


2025 Catalogue

KUZTM



PURSUE PERFECTION

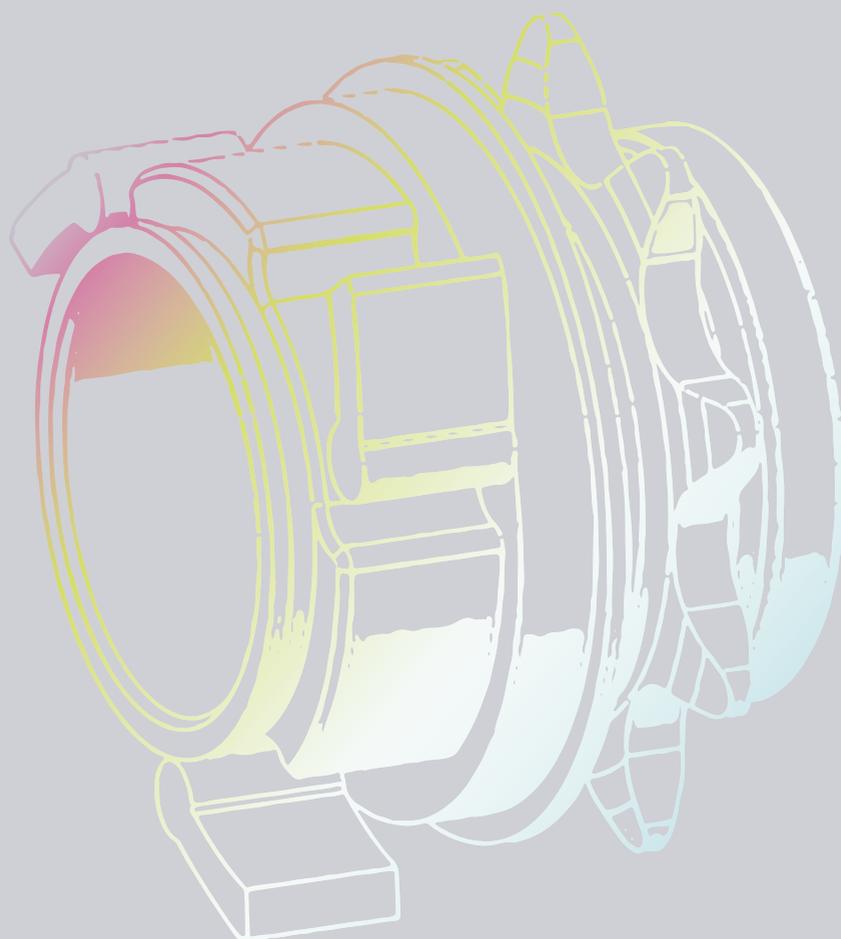



contents

- 03 MTB / E-MTB
- 09 MTB / SINGLE SPEED
- 10 ROAD DISC / GRAVEL
- 12 ROAD
- 14 FOLDING BIKE
- 15 BMX
- 18 FIXED GEAR
- 19 ACCESSORY

TECHNOLOGY

Center Lock version available




Indicates compatibility with SHIMANO 11/12 sp

Indicates compatibility with SRAM XD



High Precision Aluminum 7075 axle in OD17mm

Indicates compatibility with SHIMANO MICRO SPLINE 12sp



Indicates compatibility with SRAM XDR 12sp

4 in 1 system allowing the conversion between standard QR 135x145 to 12x135 , 12x142 , 10x135



5 in 1 system allowing the conversion between standard QR to 20mm , 15mm , 12mm , 9mm

Indicates the significant design which provides durability for E-MTB



Premium cartridge sealed bearing optimize your hub, ensuring that rolling smooth and water renaissance




3/4/5/6 pawls freehub body with individual springs



All In One KUZTM Driver Compatibility

One piece forged AL6061 hub shell with precise cnc machined

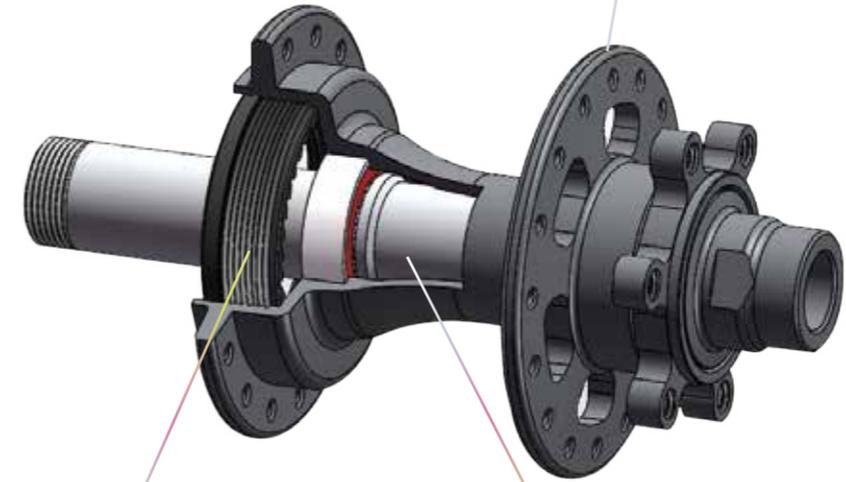

High tensile cr-mo ratchet ring

Oversized 19mm AL-7075 axle

Double rows high precise cartridge sealed bearings



All new individual 4 pawls & 4 springs engaged system



ALL IN ONE : High compatibility of all kinds cassette



DHF112

- O.L.D 110
- SPOKE HOLE 28/32/36
- P.C.D. 58/58
- AXLE 15MM
- SEALED BEARING 2PCS
- WEIGHT 197G



OPTION : CENTER LOCK VERSION : **DHF1C2**

OPTION : SUPER BOOST : **DHF412** 188G



CRF8L2

- O.L.D 110
- SPOKE HOLE 24/28/32/36
- P.C.D. 45/45
- AXLE 15MM
- SEALED BEARING 2PCS
- WEIGHT 158G



DHF232

- O.L.D 110
- SPOKE HOLE 28/32/36
- P.C.D. 58/51.5
- AXLE 15MM
- SEALED BEARING 2PCS
- WEIGHT 170G



OPTION : CENTER LOCK VERSION : **DCF232**



DHF122

- O.L.D 110
- SPOKE HOLE 28/32/36
- P.C.D. 58/58
- AXLE 20MM
- SEALED BEARING 2PCS
- WEIGHT 202G



OPTION : CENTER LOCK VERSION : **KT-TB5F**



DHF222

- O.L.D 100
- SPOKE HOLE 24/28/32/36
- P.C.D. 58/45
- AXLE 15MM
- SEALED BEARING 2PCS
- WEIGHT 137G



OPTION : CENTER LOCK VERSION : **DHF2C2**

OPTION : END CAP M9X100X108MM / 12X100MM



DHR1S5-SH

- O.L.D 148
- SPOKE HOLE 28/32/36
- P.C.D. 58/58
- PALWS 5
- AXLE 12MM
- SEALED BEARING 6PCS
- WEIGHT 360g



- OPTION : CENTER LOCK VERSION : **DCR1S5-SH**
- OPTION : SRAM XD DRIVE : **DHR1S5-XD**
- OPTION : SHIMANO MICRO SPLINE : **DHR1S5-XT**
- OPTION : DHR1S5-A WITH CR-MO AXLE & CASSETTE FOR E-MTB



DHR2S4-SH

- O.L.D 142
- SPOKE HOLE 28/32/36
- P.C.D. 58/58
- PALWS 5
- AXLE 12MM
- SEALED BEARING 5PCS
- WEIGHT 345g



- OPTION : CENTER LOCK VERSION : **DCR2S4-SH**
- OPTION : SRAM XD DRIVE : **DHR2S4-XD**
- OPTION : SHIMANO MICRO SPLINE : **DHR2S4-XT**
- OPTION : DHR2S4-A WITH CR-MO AXLE & CASSETTE FOR E-MTB



DHR275 7SP

- O.L.D 150
- SPOKE HOLE 28/32/36
- P.C.D. 58/58
- PALWS 5
- AXLE 12MM
- SEALED BEARING 6PCS
- WEIGHT 327G



- OPTION : CAP FOR 12X157



DHR2S5-SH

- O.L.D 150
- SPOKE HOLE 28/32/36
- P.C.D. 58/58
- PALWS 5
- AXLE 12MM
- SEALED BEARING 6PCS
- WEIGHT 370G



- OPTION : CENTER LOCK VERSION : **DCR2S5-SH**
- OPTION : SRAM XD DRIVE : **DHR2S5-XD**
- OPTION : SHIMANO MICRO SPLINE : **DHR2S5-XT**
- OPTION : CAP FOR 12X157
- OPTION : DHR2S5-A WITH CR-MO AXLE & CASSETTE FOR E-MTB



DHF352

- O.L.D 100
- SPOKE HOLE 24/28
- SEALED BEARING 2PCS
- WEIGHT 138G
- P.C.D.
- AXLE 12/15MM



OPTION : CENTER LOCK VERSION : DHF3L2 128G

OPTION : END CAP M9X100X108MM / 12X100MM / 15X100



DHR356

- O.L.D 142
- SPOKE HOLE 24/28/32/
- SEALED BEARING 5PCS
- WEIGHT 338G
- P.C.D.
- AXLE 12
- PALWS 5



OPTION : CENTER LOCK VERSION : DHR3L6 328G

OPTION : SRAM XD DRIVE : DHR3S6-XD





MSR114

- O.L.D 135/142
- SPOKE HOLE 28/32/36
- P.C.D. 58/58
- PALWS 5
- ACCESSORY ALLOY SPACER / SPROCKET 14-18T / LOCK RING
- AXLE 12MM
- SEALED BEARING 4PCS
- WEIGHT 289G



OPTION : CENTER LOCK VERSION : **MSR1C4**

OPTION : CAP FOR 12x135mm

OPTION : 3/8 BOLT TYPE : **MSR184**



MSR3H5

- O.L.D 135/142
- SPOKE HOLE 28/32/36
- P.C.D. 58/58
- WEIGHT 355G
- ACCESSORY ALLOY SPACER / SPROCKET 14-18T / LOCK RING
- AXLE 3/8 BOLT TYPE
- SEALED BEARING 4PCS
- PALWS 5



MDR114

- O.L.D 135
- SPOKE HOLE 32/36
- P.C.D. 58/58
- WEIGHT 331G
- AXLE 3/8 BOLT TYPE
- SEALED BEARING 4PCS
- PALWS 3



OPTION : 9-13T AVAILABLE



GRF3S2

- O.L.D 100
- SPOKE HOLE 24/28
- P.C.D. 44/44
- AXLE 12/15MM
- SEALED BEARING 2PCS
- WEIGHT 120G



OPTION : M9X100X108/12X100/15X100MM



GRR3S5

- O.L.D 142
- SPOKE HOLE 24/28
- P.C.D. 44/44
- ALWS 4
- AXLE 12MM
- SEALED BEARING 5PCS
- WEIGHT 286G



OPTION : SRAM XDR DRIVER : GRR3S5-XDR

OPTION : 12X135 / M10X135X145 QR



GRF3L2

- O.L.D 100
- SPOKE HOLE 24/28
- P.C.D. 44/44
- ALWS 4
- AXLE 12/15MM
- SEALED BEARING 2PCS
- WEIGHT 115G



OPTION : M9X100X108/12X100/15X100MM



GRR3L5

- O.L.D 142
- SPOKE HOLE 24/28
- P.C.D. 44/44
- ALWS 4
- AXLE 12MM
- SEALED BEARING 5PCS
- WEIGHT 286G



OPTION : SRAM XDR DRIVER : GRR3L5-XDR

OPTION : 12X135 / M10X135X145 QR



GRR615

- O.L.D 142
- SPOKE HOLE 24/28/32/36
- P.C.D. 58/58
- PALWS 4
- AXLE 12MM
- SEALED BEARING 5PCS
- WEIGHT 286G



OPTION : CENTER LOCK VERSION : GRR6L5 274G

OPTION : CAP FOR 12X135/M9X100X108 AVAILABLE

OPTION : SRAM XDR DRIVER : GRR615-XDR



CRF7L2

- O.L.D 100
- SPOKE HOLE 24/28/32/36
- P.C.D. 45/45
- AXLE 12/15MM
- SEALED BEARING 2PCS
- WEIGHT 158G



GRR6L5

- O.L.D 142
- SPOKE HOLE 24/28/32/36
- P.C.D. 58/58
- PALWS 4
- AXLE 12MM
- SEALED BEARING 5PCS
- WEIGHT 274G



OPTION : CAP FOR 12X135/M9X100X108 AVAILABLE



SPF222

- O.L.D 100
- SPOKE HOLE 18/20
- AXLE 9MM
- SEALED BEARING 2PCS
- WEIGHT 90G



SPF412

- O.L.D 100
- SPOKE HOLE 18/20
- AXLE 9MM
- SEALED BEARING 2PCS
- WEIGHT 98G



SPR414

- O.L.D 130
- SPOKE HOLE 21/24
- AXLE M10
- SEALED BEARING 4PCS
- PALWS 3
- WEIGHT 249G

OPTION : CAMPY DRIVER : SPR4C4



SPF332

- O.L.D 100
- SPOKE HOLE 18/20
- AXLE 9MM
- SEALED BEARING 2PCS
- WEIGHT 78G



SPF354

- O.L.D 100
- SPOKE HOLE 12/16/20
- AXLE 12/15MM
- SEALED BEARING 2PCS
- WEIGHT 106G



SPR225

- O.L.D 130
- SPOKE HOLE 20/24
- AXLE M10
- SEALED BEARING 4PCS
- PALWS 3
- WEIGHT 258G

OPTION : CAMPY DRIVER : **SPR2C5** 262G

OPTION : SRAM XDR DRIVER : **SPR2X5**

FXF212

- O.L.D 74
- SPOKE HOLE 10/16/20
- AXLE 9MM / M6 BOLT TYPE
- SEALED BEARING 2PCS
- WEIGHT 75G

OPTION : CAP FOR 74w / 84w / 90w / 95w / 100w



FDF112 (KT-S73F)

- O.L.D 74
- SPOKE HOLE 24/28/32
- AXLE 9MM
- SEALED BEARING 2PCS
- WEIGHT 185G



BXF112

- O.L.D 100
- SPOKE HOLE 28/36
- P.C.D. 45/45
- AXLE M10 BOLT TYPE
- SEALED BEARING 2PCS
- WEIGHT 146G

OPTION : 3/8 BOLT TYPE : **BXF182**



BXF302

- O.L.D 100
- SPOKE HOLE 28/32/36
- P.C.D 51/51
- AXLE 20MM
- SEALED BEARING 2PCS
- WEIGHT 185

OPTION : ADAPTOR FOR 3/8 BOLT TYPE AVAILABLE



BXR114

- O.L.D 110
- SPOKE HOLE 28/36
- P.C.D. 60/44
- PALWS 6
- AXLE M10 BOLT TYPE
- SEALED BEARING 4PCS
- WEIGHT 289G

ACCESSORY ALLOY SPACER / SPROCKET 14-18T / LOCK RING

OPTION : 3/8 BOLT TYPE : **BXR184**

OPTION : CENTER LOCK VERSION : **BCR114 M10 BOLT**

OPTION : CENTER LOCK VERSION : **BCR184 3/8 BOLT**



BXR214

- O.L.D 110
- SPOKE HOLE 28/36
- P.C.D. 61/45
- PALWS 6
- AXLE M10 BOLT TYPE
- SEALED BEARING 4PCS
- WEIGHT 272G

ACCESSORY ALLOY SPACER / SPROCKET 14-18T / LOCK RING

OPTION : 3/8 BOLT TYPE : **BXR284**



BXF512

- O.L.D 100
- SPOKE HOLE 28/36
- P.C.D. 32/32
- AXLE M6 BOLT TYPE
- SEALED BEARING 2PCS
- WEIGHT 98G





BXR524

- O.L.D 110
- SPOKE HOLE 28/36
- SEALED BEARING 4PCS
- PALWS 3
- P.C.D. 40/49
- AXLE 3/8 BOLT TYPE
- WEIGHT 316G

ACCESSORY ALLOY SPACER / SPROCKET 14-18T / LOCK RING



BMR214

- O.L.D 110
- SPOKE HOLE 36
- LHD & RHD ONE PIECE DRIVER 9T /10T /11T
- PALWS 3
- AXLE M14 AXLE
- SEALED BEARING 4PCS +1 NEEDLE BEARING
- WEIGHT 566G

OPTION : 3/8 BOLT TYPE : **BMR114**



FIF112

- O.L.D 100
- SPOKE HOLE 32/36
- P.C.D 61.5/61.5
- AXLE 3/8
- SEALED BEARING 2PCS
- WEIGHT 229G

OPTION QR TYPE : **FIF1Q2**



FIR112

- O.L.D 120
- SPOKE HOLE 32/36
- P.C.D 62.5/62.5
- AXLE 3/8
- SEALED BEARING 2PCS
- Freewheel : L : Fixed Gear / R : BC 1.37X24T
- ACCESSORY 14/15/16/17/18T (1/8') & WASHER 1.0T & LOCK RING 53G
- WEIGHT 299G (WITHOUT ACCESSORY)

OPTION QR TYPE : **FIR1Q2**

OPTION BOTH SIDE FIXED : **FIR122**



快拆長度表

MODEL	OLD	PITCH	B±1	THREAD LENGTH	WITH NUT	SYSTEM	
ROAD	100	M12*P1.5	120	12	-	-	
		M12*P1.5	121.5	13.5	-	SHIMANO	
		M12*P1.5	125	16	-	SRAM	
		M15*P1.5	125	16	-	SRAM	
MTB	142	M12*P1.5	163.5	13.5	-	SHIMANO	
		M12*P1.5	165	18	-	SHIMANO	
		M12*P1.0	166	20	Y	SYNTACE	
		M12*P1.0	166	20	-	DT SWISS	
		M12*P1.75	167	20	-	SRAM	
		M12*P1.5	170	18	Y	SHIMANO	
		M12*P1.5	172	18	Y	SHIMANO	
		M12*P1.75	174	20	-	SRAM	
		148	M12*P1.5	178	18	Y	SHIMANO
			M12*P1.75	180	20	-	SRAM
FAT BIKE	150	M15*P1.5	199	12	-	ROCKSHOX	
	197	M12*P1.5	227	18	Y	SHIMANO	
		M12*P1.75	229	20	-	SRAM	
MTB	100	M14*P1.5	145	16	Y	FOX	
		M15*P1.5	150	20	-	SRAM	

KU501F 56g
KU501R 60g



KU502F 57g
KU502R 72g



KUI2CR-SH
KUI2CR-SR 43g



KUI2AR-SH
KUI2AR-SR 81g



KUI2BR-SH
KUI2BR-SR 64g



KUI2DR-SH
KUI2DR-SR 44g



CENTER LOCK ADAPTER

PARTS NO. : TZ5F-KIT

Converter center lock to 6-bolt



FLAT SPROCKET KIT OPTION

Style A

13T ,14T , 15T, 16T, 17T (3/32 2.3T)



Alloy lock ring

Style B

13T ,14T , 15T, 16T, 17T (3/32 2.3T)



Alloy lock ring

ALLOY SPACER / CONVERTER WASHER

ALLOY SPACER



1.5T

DRIVER FOR MTB DHR SERIES



DRIVER FOR ROAD DISK GRR SERIES



DRIVER FOR RACING BXR SERIES



150T



明倫運動器材(淮安)有限公司
Ming Lun Sports (Huai'An) Co.,LTD

T:+86-517-8989-7100 F:+86-517-8989-7071 E:kuztm@kthub.com
江蘇省淮安經濟技術開發區深圳東路289號 郵編: 223001
NO.289, Shenzhen East Road, Huaian Economic And
Technical Development Zone, Jiangsu, China P.C. : 223001



www.ktgroup.net

明鋒貿易

42951 台灣台中市神岡區庄前路 28號
No.28. Zhuangqion Rd.. Shengang Dist., Taichung City 429. Taiwan (R.O.C.)

TEL | +886-4-2563-0919 FAX | +886-4-2563-0959
Web | <http://www.ktgroup.net>

TAIMCO
Germany Agent

Taimco e.K. Bahnhofstraße 11 32105 Bad Salzufen (Germany)

TEL | 0049(0)5222-639715 FAX | 0049(0)5222-366870
E-mail | service@taimco.de Web | <http://www.taimco.de/net>