



QUANTA



Welcome to KT world

1947 KT established in 1947, Taichung, Taiwan

1999 In order to serve and satisfy more subscribers,
We established the factory in Shenzhen at 1999 .

2014
2016 Huaian Factory is established at 2014 and production at 2016 .

CONTENTS

03	/E-MTB	H5ER
04	/DH/MTB	TWXF / M4TR / MS6F / MS1R / MZ3R T55F / TM7R / MZ5R / ME6F / ME6R SN3F / SN3R / MF1F / M4ZR / SN8R / MQ5R
05	/MTB DISC	T04F / TR8R / MH8F / MR5R K68F / K68R / TD6R
12	/MTB V-Brake	C99F / CT1R / SH1F / SH3R A15F / AYER / A12R
15	/MTB Steel	122F / 103F / 122R
17	/GRAVAL BIKE	XF1F / XF1R / MSCF / SNCR
18	/CYCLECROSS BIKE	XA2F / XA2R / XS3F / XS8R
19	/ROAD	QA1F / QA1R / 599F / GT2R ZQ1F / QZ1R / 51BF / G5ER GP5F / C08R / 515F / 512R
22	/FIXIE BIKE	DP6F / DP6R / 576F / 513R
23	/BMX/DIRT JUMP	MHGF / MI5R / MBAF / MBAR / MI0F / MI8R M18F / M89R / 566F / A89R
26	/BMX/RACING	AF1F / MA5R / M6GF / M95R
27	/BMX/Freecoaster	350F / 355R / 3V5R
28	/BMX/Street	12TF / 12TR / 11TF / 11TR / 104R
29	/FOLDING BIKE	A8BF / 588R / A8QF / A86R
30	/URBAN BIKE	325R / 3A5R / 319R / 305R 762R / 155F / 156F / 16CR / 3D5R
33	/SPARE PARTS	



Mirco Splined 12S



KT-H5ER

422g



E-BIKE

- Use/ **DH, Boost, E-MTB**
- Features/ **Disc Brake Mount**
- Body/ **Alloy 1 Piece Forged. CNC**
- Freewheel/ **Cr-Mo Cassette 3 Pawls and 1Spring**
- Bearing/ **Sealed. x 5pcs**
- Axle/ **Cr-Mo Steel**
- Axle Dim/ **19 (ID12)*148mm**
- Spoke/ **14G. 32,36**
- Flange PCD/ **58mm**
- Flange Spacing/ **63mm**
- Option/ **KT-H4ER for center lock**



KT-M5ER 8/9/10/11S (for MTB series)

- Use/ DH, Boost, E-MTB
- Features/ Disc Brake Mount
- Body/ Alloy 1 Piece Forged. CNC
- Freewheel/ Cr-Mo Cassette 4 Pawls and 1spring
- Bearing/ Sealed. x 5pcs
- Axle/ Cr-Mo Steel
- Axle Dim/ 19 (ID12)*148mm
- Spoke/ 14G. 32,36
- Flange PCD/ 58mm
- Flange Spacing/ 63mm
- Option/ Exchangable for Sram XD Driver
KT-M4ER for center lock

461g



MTB



DISC



KT-TWXF

- Use/ Downhill, Boost, E-MTB
- Features/ Disc Brake Mount
- Body/ Alloy 1 Piece Forged. CNC
- Bearing/ Sealed. x 2 pcs
- Axle/ 7075 Alloy. Machined
- Axle Dim/ Dim: ID15*110mm
- Spoke/ 14G. 32,36
- Flange PCD/ 58mm
- Flange Spacing/ 64mm

197g



KT-M4TR 9/10/11S (for MTB series)

- Use/ DH, Boost
- Features/ Disc Brake Mount
- Body/ Alloy 1 Piece Forged. CNC
- Freewheel/ Cr-Mo Cassette 4 Pawls and 1spring
- Bearing/ Sealed. x 4pcs
- Axle/ Cr-Mo Steel
- Axle Dim/ 19 (ID12)*148mm
- Spoke/ 14G. 32,36
- Flange PCD/ 58mm
- Flange Spacing/ 63mm
- Option/ Exchangable for Sram XD Driver

444g



MTB



DISC



179g

KT-ME6F

Use/ **XC, Commuter**
 Features/ **Disc Brake Mount**
 Body/ **Alloy 1 Piece Forged. CNC**
 Bearing/ **Sealed. x 2 pcs**
 Axle/ **7075 Alloy. Machined**
 Axle Dim/ **M9*100mm*108mm**
 Spoke/ **14G. 28,32,36**
 Flange PCD/ **L: 58mm**
 Flange Spacing/ **57.5mm**



319g

KT-ME6R 9/10/11S (for MTB series)

Use/ **XC, Commuter**
 Features/ **Disc Brake Mount**
 Body/ **Alloy 1 Piece Forged. CNC**
 Freewheel/ **Alloy Cassette 5 Pawls & 5spring**
 Bearing/ **Sealed. x 4pcs**
 Axle/ **7075 Alloy. Machined**
 Axle Dim/ **M10*135mm*145mm**
 Spoke/ **14G. 28,32,36**
 Flange PCD/ **58mm**
 Flange Spacing/ **58mm**



252g

KT-SN3F

Use/ **XC, Commuter**
 Features/ **Disc Brake Mount**
 Body/ **Alloy 1 Piece Forged. CNC**
 Bearing/ **Sealed. x 2 pcs**
 Axle/ **Cr-Mo**
 Axle Dim/ **M9*100mm*108mm**
 Spoke/ **14G. 28,32,36**
 Flange PCD/ **58mm**
 Flange Spacing/ **8mm**
 Option/ **SN6F w/o CNC Disc Mount and Flange**



434g

KT-SN3R 9/10/11S (for MTB series)

Use/ **XC, Commuter**
 Features/ **Disc Brake Mount**
 Body/ **Alloy 1 Piece Forged. CNC**
 Freewheel/ **Steel Splined 3 Pawls**
 Bearing/ **Sealed. x 2pcs**
 Axle/ **Cr-Mo Steel**
 Axle Dim/ **M10*135mm*145mm**
 Spoke/ **14G. 28,32,36**
 Flange PCD/ **58mm**
 Flange Spacing/ **55mm**
 Option/ **SN6R w/o CNC Disc Mount and Flange**





168g

KT-T55F

Use/ Freeride, DH, E-MTB
 Features/ Center lock
 Body/ Alloy 1 Piece Forged. CNC
 Bearing/ Sealed. x 2 pcs
 Axle/ 7075 Alloy. Machined
 Axle Dim/ ID15*110mm
 Spoke/ 14G. 32,36
 Flange PCD/ 45mm
 Flange Spacing/ 65mm



MTB



DISC



307g

KT-TM7R *Single Speed*

Use/ Urban, Belt Drive
 Features/ Center lock
 Body/ Alloy 1 Piece Forged. CNC
 Freewheel/ Cr-Mo Cassette 5 Pawls and 5 springs
 Bearing/ Sealed. x 4pcs
 Axle/ 7075 Alloy. Machined
 Axle Dim/ M10*135mm*145mm
 Spoke/ 14G. 32,36
 Flange PCD/ L:45mm/R:54mm
 Flange Spacing/ 70mm
 Option/ Exchangable for ID12*142mm



444g

KT-MZ5R *Single Speed*

Use/ Freeride, DH
 Features/ Disc Brake Mount
 Body/ Alloy 1 Piece Forged. CNC
 Freewheel/ Alloy Cassette 5 Pawls and 5 Spring
 Bearing/ Sealed*4pcs
 Axle/ Cr-Mo Steel
 Axle Dim/ 19(ID12)*142mm
 Spoke/ 14G. 32,36
 Flange PCD/ 58mm
 Flange Spacing/ 78mm



MTB



DISC



199g

KT-MF1F

- Use/ Freeride, Downhill
 Features/ Disc Brake Mount
 Body/ Alloy 1 Piece Forged. CNC
 Bearing/ Sealed. x 2 pcs
 Axle/ 7075 Alloy. Machined
 Axle Dim/ $\text{\$}15^*100\text{mm}$
 Spoke/ 14G. 32,36
 Flange PCD/ 58mm
 Flange Spacing/ 57mm
 Option/ KT-MS1F ID15*100mm loose ball
 KT-TZ5F Center lock type



440g

KT-M4ZR 9/10/11S
(for MTB series)


- Use/ Freeride, DH
 Features/ Disc Brake Mount
 Body/ Alloy 1 Piece Forged. CNC
 Freewheel/ Cr-Mo Cassette 3 Pawls and 1 spring
 Bearing/ Sealed. x 4pcs
 Axle/ Cr-Mo Steel
 Axle Dim/ 19 (ID12)*142mm
 Spoke/ 14G. 32,36
 Flange PCD/ 58mm
 Flange Spacing/ 58mm
 Option/ KT-TZ9R Center lock version



402g

KT-SN8R 8/9/10S

- Use/ Freeride, DH
 Features/ Disc Brake Mount
 Body/ Alloy 1 Piece Forged. CNC
 Freewheel/ Cr-Mo Cassette 3 Pawls and 1 Spring
 Bearing/ Sealed. x 2pcs
 Axle/ Cr-Mo Steel
 Axle Dim/ 19(ID12)*142mm
 Spoke/ 14G. 32,36
 Flange PCD/ 58mm
 Flange Spacing/ 55mm
 Option/ 2 In 1 exchangeable converter caps from ID12 to ID 5.2

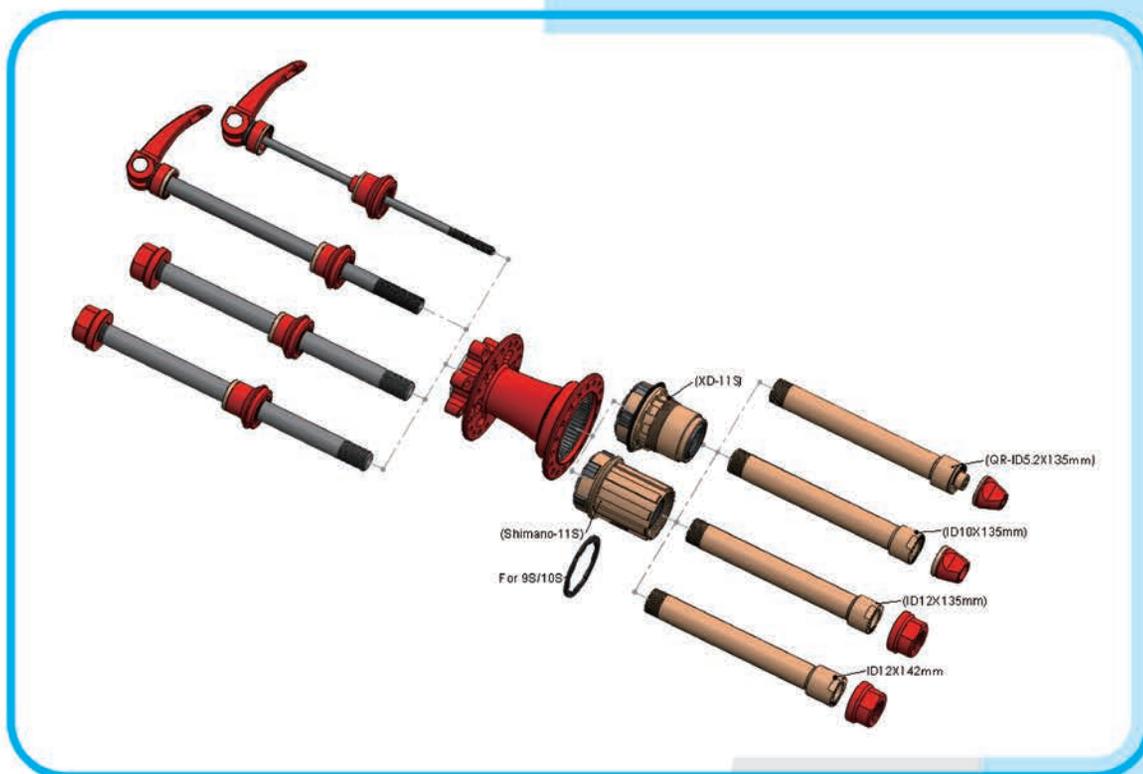

KT-MQ5R Sram XD Driver

- Use/ Freeride, DH
- Features/ Disc Brake Mount
- Body/ Alloy 1 Piece Forged. CNC
- Freewheel/ Alloy Cassette 5 Pawls and 5 Springs
- Bearing/ Sealed. x 4pcs
- Axle/ Cr-Mo Steel
- Axle Dim/ 15 (ID12)*142mm/(ID5.2)M10*135mm*145mm
- Spoke/ 14G. 32,36
- Flange PCD/ 58mm
- Flange Spacing/ 58mm
- Option/ 3 In 1 exchangeable converter axle from ID12 to ID10 or ID 5.2 Shimano cassette body 11S (for MTB series) exchangeable



MTB



DISC



288g

KT-MS6F

Use/ **Downhill, Boost**
 Features/ **Disc Brake Mount**
 Body/ **Alloy 1 Piece Forged. CNC**
 Rolling System/ **Loose balls**
 Axle/ **Cr-Mo steel**
 Axle Dim/ **15*110mm**
 Spoke/ **14G. 32,36**
 Flange PCD/ **58mm**
 Flange Spacing/ **64mm**
 Option/ **TQ5F ID15*110mm for Center lock w/o lock ring**



485g

KT-MS1R 9/10/11S
(for MTB series)

Use/ **DH, Freeride**
 Features/ **Disc Brake Mount**
 Body/ **Alloy 1 Piece Forged. CNC**
 Freewheel/ **Cr-Mo Cassette 3 Pawls and 1 Spring**
 Rolling System/ **Loose balls**
 Axle/ **Cr-Mo Steel**
 Axle Dim/ **19*(ID12)*142mm**
 Spoke/ **14G. 32,36**
 Flange PCD/ **58mm**
 Flange Spacing/ **63mm**



457g

KT-MZ3R Sram XD Driver

Use/ **Freeride, DH**
 Features/ **Disc Brake Mount**
 Body/ **Alloy 1 Piece Forged. CNC**
 Freewheel/ **Cr-Mo Cassette 3 Pawls and 1 Spring**
 Bearing/ **Sealed. x 2pcs**
 Axle/ **Cr-Mo Steel**
 Axle Dim/ **19 (ID12)*142mm**
 Spoke/ **14G. 32,36**
 Flange PCD/ **58mm**
 Flange Spacing/ **56mm**



KT-T04F

Use/ **XC, Commuter, Urban**
 Features/ **Disc Brake Mount**
 Body/ **Alloy 1 Piece Forged. CNC**
 Rolling System/ **Loose Balls**
 Axle/ **Cr-Mo Steel**
 Axle Dim/ **M9*100mm*108mm**
 Spoke/ **14G. 28,32,36**
 Flange PCD/ **L: 57mm/R: 45mm**
 Flange Spacing/ **53.25mm**

245g



KT-TR8R 8/9/10S

Use/ **XC, Commuter, Urban**
 Features/ **Disc Brake Mount**
 Body/ **Alloy 1 Piece Forged. CNC**
 Freewheel/ **Steel Splined 3 Pawls**
 Rolling System/ **Loose Balls**
 Axle/ **Cr-Mo Steel**
 Axle Dim/ **M10*135mm*145mm**
 Spoke/ **14G. 28,32,36**
 Flange PCD/ **L: 57mm/R: 45mm**
 Flange Spacing/ **56.5mm**

441g



KT-K08F

Use/ **XC, Commuter, Urban**
 Features/ **Disc Brake Mount**
 Body/ **Alloy 1 Piece Forged. CNC**
 Rolling System/ **Loose Balls**
 Axle/ **Cr-Mo Steel**
 Axle Dim/ **M9*100mm*108mm**
 Spoke/ **14G. 28,32,36**
 Flange PCD/ **58mm**
 Flange Spacing/ **57.5mm**
 Option/ **KT-KD8F CNC disc mount and flange 246g**

251g



KT-K08R 9/10/11S

Use/ **XC, Commuter, Urban**
 Features/ **Disc Brake Mount**
 Body/ **Alloy 1 Piece Forged. CNC**
 Freewheel/ **Steel Splined 3 Pawls**
 Rolling System/ **Loose Balls**
 Axle/ **Cr-Mo Steel**
 Axle Dim/ **M10*135mm*145mm**
 Spoke/ **14G. 28,32,36**
 Flange PCD/ **58mm**
 Flange Spacing/ **56mm**
 Option/ **KT-KD8R CNC disc mount and flange 441g**

450g





MTB



DISC



263g

**KT-K68F**

Use/ **XC, Commuter, Urban**
 Features/ **Disc Brake Mount**
 Body/ **Alloy 1 Piece Forged. CNC**
 Rolling System/ **Loose Balls**
 Axle/ **Cr-Mo Steel**
 Axle Dim/ **M9*100mm*108mm**
 Spoke/ **14G. 28,32,36**
 Flange PCD/ **58mm**
 Flange Spacing/ **53.25mm**
 Option/ **KT-K88F 3/8" solid axle**



462g

**KT-K68R 8/9/10S**

Use/ **XC, Commuter, Urban**
 Features/ **Disc Brake Mount**
 Body/ **Alloy 1 Piece Forged. CNC**
 Freewheel/ **Freewheel: Steel Screwing 2 Pawls**
 Bearing/ **Loose Balls**
 Axle/ **Cr-Mo Steel**
 Axle Dim/ **M10*135mm*145mm**
 Spoke/ **14G. 28,32,36**
 Flange PCD/ **57mm**
 Flange Spacing/ **56.5mm**
 Option/ **KT-K88R 3/8" solid axle**
KT-K69R for Sram PG 12sp



362g

KT-TD6R 7S

Use/ **XC, Commuter, Urban**
 Features/ **Disc Brake Mount**
 Body/ **Alloy 1 Piece Forged. CNC**
 Freewheel/ **Thread Type**
 Rolling System/ **Loose Balls**
 Axle/ **Cr-Mo Steel**
 Axle Dim/ **3/8"135mm*175mm**
 Spoke/ **14G. 28,32,36**
 Flange PCD/ **58mm**
 Flange Spacing/ **56.75mm**
 Option/ **TD3R-3/8"114mm*170mm 1S**
TDAR-3/8" Axle 8/9S
TD7R-M10 QR Type 7S
TD8R-M10 QR Type 8/9S



KT-C99F

Use/ **XC, Commuter, Urban**
 Features/ **V-Brake**
 Body/ **Alloy 1 Piece Forged. CNC**
 Bearing/ **Sealed. x 2 pcs**
 Axle/ **7075 Alloy. Machined**
 Axle Dim/ **M9*100mm*108mm**
 Spoke/ **14G. 28,32,36**
 Flange PCD/ **40mm**
 Flange Spacing/ **75mm**

149g



KT-CT1R 8/9/10S

Use/ **XC, Commuter, Urban**
 Features/ **Disc Brake Mount**
 Body/ **Alloy 1 Piece Forged. CNC**
 Freewheel/ **Steel Splined 3 Pawls**
 Rolling System/ **Loose Balls**
 Axle/ **Cr-Mo Steel**
 Axle Dim/ **M10*135mm*145mm**
 Spoke/ **14G. 28,32,36**
 Flange PCD/ **L: 57mm/R: 45mm**
 Flange Spacing/ **56.5mm**

441g



KT-SH1F

Use/ **Economic XC, Commuter, Urban**
 Features/ **V-Brake**
 Body/ **Alloy 1 Piece Forged. CNC**
 Rolling System/ **Loose Balls**
 Axle/ **Cr-Mo Steel**
 Axle Dim/ **M9*100mm*108mm**
 Spoke/ **14G. 24,28,32,36**
 Flange PCD/ **38mm**
 Flange Spacing/ **71.5mm**
 Option/ **KT-SH6F 3/8" solid axle**

162g



KT-SH3R 8/9/10S

Use/ **XC, Commuter, Urban**
 Features/ **V-Brake**
 Body/ **Alloy 1 Piece Forged. CNC**
 Freewheel/ **Steel Screwing 2 Pawls**
 Rolling System/ **Loose Balls**
 Axle/ **Cr-Mo Steel**
 Axle Dim/ **M10*135mm*145mm**
 Spoke/ **14G. 28,32,36**
 Flange PCD/ **45mm**
 Flange Spacing/ **58.5mm**
 Option/ **KT-SH4R 3/8" solid axle 8/9/10spd**
KT-SH7R M10*135mm*145mm 7spd

412g





153g

KT-A15F

Use/ **Economic XC, Commuter, Urban**
 Features/ **V-Brake**
 Body/ **Alloy 1 Piece Forged. CNC**
 Rolling System/ **Loose Balls**
 Axle/ **Cr-Mo Steel**
 Axle Dim/ **M9*100mm*108mm**
 Spoke/ **14G. 28,32,36**
 Flange PCD/ **38mm**
 Flange Spacing/ **71.5mm**
 Option/ **A55F-Rubber Seal**
A16F-3/8" Axle w/Steel Cap
A56F-3/8" Axle, Rubber Seal
A14F-M9 Solid Axle



412g

KT-AYER 8/9/10S

Use/ **XC, Commuter, Urban**
 Features/ **V-Brake**
 Body/ **Alloy 1 Piece Forged. CNC**
 Freewheel/ **Steel Screwing 2 Pawls**
 Rolling System/ **Loose Balls**
 Axle/ **Cr-Mo Steel**
 Axle Dim/ **M10*135mm*145mm**
 Spoke/ **14G. 28,32,36**
 Flange PCD/ **45mm**
 Flange Spacing/ **58.5mm**
 Option/ **AZER-M10 QR Type w/Rubber Seal 8/9/10S**
AZDR-3/8" Axle w/Rubber Seal 8/9/10S
AYDR-3/8" Axle w/Steel Cap 8/9/10S
AY1R-3/8" Axle w/Steel Cap 7S
AZ1R-3/8" Axle w/Rubber Seal 7S
AZ2R-M10 QR Type w/Rubber Seal 7S
AY2R-M10 QR Type w/Steel Cap 7S



257g

KT-A12R 6/7S

Use/ **Economic XC, Commuter, Urban**
 Features/ **V-Brake**
 Body/ **Alloy 1 Piece Forged. CNC**
 Freewheel/ **Thread Type**
 Rolling System/ **Loose Balls**
 Axle/ **Cr-Mo Steel**
 Axle Dim/ **M10*135mm*145mm**
 Spoke/ **14G. 24,28,32,36**
 Flange PCD/ **45mm**
 Flange Spacing/ **57mm**
 Option/ **A11R-3/8" Axle 6/7S**
A13R-3/8" Axle Single Speed
A1HR-3/8" Axle 8S
A1ER-M10 QR Type 8S
A51R-3/8" Axle w/Rubber Seal 6/7S
A52R-M10 QR Type w/Rubber Seal 6/7S
A5ER-M10 QR Type w/Rubber Seal 8S

**KT-SR3F**

- Use/ **Fat Bike**
 Features/ **Disc Brake Mount**
 Body/ **Alloy 1 Piece Forged. CNC**
 Bearing/ **Sealed. x 2 pcs**
 Axle/ **7075 Alloy. Machined**
 Axle Dim/ **M9*135mm*145mm**
 Spoke/ **14G. 32,36**
 Flange PCD/ **58mm**
 Flange Spacing/ **80mm**
 Option/ **SL4F M10*135mm*145mm loose ball QR type**
SL5F 3/8"*135mm*175mm loose ball Nut type
S3CF ID12*135mm seal bearing

265g



FAT/SNOW

**KT-S7LR 8/9/10/11S**

- Use/ **Fat Bike**
 Features/ **Disc Brake Mount**
 Body/ **Alloy 1 Piece Forged. CNC**
 Freewheel/ **Cr-Mo Cassette 3 Pawls & 1 Spring**
 Bearing/ **Sealed. x 2pcs**
 Axle/ **7075 Alloy. Machined**
 Axle Dim/ **M10*170mm*180mm**
 Spoke/ **14G. 32,36**
 Flange PCD/ **58mm**
 Flange Spacing/ **89mm**
 Option/ **SL4R M10*170mm*180mm loose ball QR type**
SL5R 3/8"*170mm*210mm loose ball Nut type
SL8R M10*190mm*200mm loose ball QR type
SL9R 3/8"*190mm*230mm loose ball Nut type
SN7R ID12*177mm w/o thru axle
M97R ID12*177mm w/o thru axle 4 seal bearings

456g

**KT-M9CF**

- Use/ **Fat Bike**
 Features/ **Disc Brake Mount**
 Body/ **Alloy 1 Piece Forged. CNC**
 Bearing/ **Sealed. x 2 pcs**
 Axle/ **7075 Alloy. Machined**
 Axle Dim/ **ID15*150mm w/o thru axle**
 Spoke/ **14G. 36**
 Flange PCD/ **58mm**
 Flange Spacing/ **98mm**
 Option/ **M9CF-QR w/exchangeable end cap to ID5.2 w/205Y QR**
M9DF M9*150mm*160mm loose balls type

266g

**KT-M9CR 8/9/10/11S**

- Use/ **Fat Bike**
 Features/ **Disc Brake Mount**
 Body/ **Alloy 1 Piece Forged. CNC**
 Freewheel/ **Cr-Mo Cassette 3 Pawls and 1 Spring**
 Bearing/ **Sealed. x 5pcs**
 Axle/ **Cr-Mo Steel**
 Axle Dim/ **ID12*190mm w/o thru axle**
 Spoke/ **14G. 36**
 Flange PCD/ **58mm**
 Flange Spacing/ **99mm**
 Option/ **M9CR-QR w/exchangeable end cap to ID5.2 w/205Y QR**
M9ZR ID12*197mm

536g



MTB



STEEL



443g

KT-M65F

PAT. NO:20304492.4GE

Use/ **Economic, Commuter, Urban**
 Features/ **Disc Brake Mount**
 Body/ **Steel**
 Rolling System/ **Balls Retainer**
 Axle/ **Cr-Mo Steel**
 Axle Dim/ **14G. 32,36**
 Spoke/Flange PCD/ **65.5mm**
 Flange Spacing/ **53mm**
 Option/ **Option: M68F-3/8" Axle**



500g

KT-M65R 6S

PAT. NO:20304492.4GE

Use/ **Economic, Commuter, Urban**
 Features/ **Disc Brake Mount**
 Body/ **Steel**
 Freewheel/ **Thread Type**
 Rolling System/ **Balls Retainer**
 Axle/ **Cr-Mo Steel**
 Axle Dim/ **M10*135mm*145mm**
 Spoke/ **14G. 32,36**
 Flange PCD/ **65.5mm**
 Flange Spacing/ **57mm**
 Option/ **M68R-3/8" Axle**
M64R-Flange Space 55mm QR Type 8/9S
M6AR-Flange Space 55mm 3/8" Axle 8/9S



149g

KT-122F

Use/ **Economic, Commuter, Urban**
 Features/ **V-Brake**
 Body/ **Steel**
 Rolling System/ **Balls Retainer**
 Axle/ **Axle: S45C Steel**
 Spoke/ **14G. 16,20,28,36**
 Flange PCD/ **38mm**
 Flange Spacing/ **69mm**
 Option/ **KT-122FQR M9 QR version (Cr-Mo Axle)**
KT-132F 48H version



385g

KT-122R 6/7S

Use/ **Economic, Commuter, Urban**
 Features/ **V-Brake**
 Body/ **Steel**
 Freewheel/ **Thread Type**
 Rolling System/ **Balls Retainer**
 Axle/ **S45C Steel**
 Axle Dim/ **3/8**135mm*175mm**
 Spoke/ **14G. 16,20,28,36**
 Flange PCD/ **45mm**
 Flange Spacing/ **56mm**
 Option:/ **KT-122RQR-M10 QR version (Cr-Mo Axle)**
KT-132R 48H



MTB



STEEL

KT-103F

178g

- Use/ **Economic, Kids (<= 20")**
 Features/ **V-Brake**
 Body/ **Steel**
 Rolling System/ **Balls Retainer**
 Axle/ **S45C Steel**
 Axle Dim/ **5/16"×83mm×120mm**
 Spoke/ **14G. 16,20,28**
 Flange PCD/ **34mm**
 Flange Spacing/ **64mm**
 Option/ **KT-104F Flange Space 74mm**
KT-183F 3/8" Axle Flange Space 64mm
KT-134F 3/8" Axle Flange Space 74mm

KT-1JJR**1S**

400g

- Use/ **Japan, Band brake, Alternative**
 Features/ **Band brake**
 Body/ **Steel**
 Freewheel/ **14T/16T Diver*2 Pawls**
 Rolling System/ **Loose Balls**
 Axle/ **Cr-Mo Steel**
 Axle Dim/ **3/8"×114mm×180/185mm**
 Spoke/ **14G. 28,32,36**
 Flange PCD/ **45mm**
 Flange Spacing/ **55mm**
 Option/ **AJJR-Alloy Hub Shel**

KT-AJJR**1S**

445g

- Use/ **Japan, Band brake, Alternative**
 Features/ **Band brake**
 Body/ **Alloy 1 Piece Forged. CNC**
 Freewheel/ **14T/16T Diver*2 Pawls**
 Rolling System/ **Loose Balls**
 Axle/ **Cr-Mo Steel**
 Axle Dim/ **3/8"×114mm×180/185mm**
 Spoke/ **14G. 32,36**
 Flange PCD/ **45mm**
 Flange Spacing/ **55mm**



169g

KT-XF1F-12

- Use/ Freeride, Downhill
- Features/ Disc Brake Mount
- Body/ Alloy 1 Piece Forged. CNC
- Bearing/ Sealed. x 2 pcs
- Axle/ 7075 Alloy. Machined
- Axle Dim/ $\text{\$}12^*100\text{mm}$
- Spoke/ 14G. 32,36
- Flange PCD/ R:58mm/L:45mm
- Flange Spacing/ 58mm
- Option/ XF1F ID15*100mm



377g

KT-XF4R 11S (for Road series)

- Use/ Freeride, Gravel,
- Features/ Disc Brake Mount
- Body/ Alloy 1 Piece Forged. CNC
- Freewheel/ Cr-Mo Cassette 3 Pawls and 1 spring
- Bearing/ Sealed. x 4pcs
- Axle/ Cr-Mo Steel
- Axle Dim/ 19 (ID12)*142mm
- Spoke/ 14G. 32,36
- Flange PCD/ R:58mm/L:48mm
- Flange Spacing/ 57mm



244g

KT-MSCF

- Use/ Gravel
- Features/ Disc Brake Mount
- Body/ Alloy 1 Piece Forged. CNC
- Bearing/ Loose balls
- Axle/ Cr-Mo Steel
- Axle Dim/ $\text{\$}12^*100\text{mm}$
- Spoke/ 14G. 32,36
- Flange PCD/ R:58mm/L:45mm
- Flange Spacing/ 58mm
- Option/ KT-MSEF center lock type



433g

KT-SNCR 11S (for Road series)

- Use/ Gravel
- Features/ Disc Brake Mount
- Body/ Alloy 1 Piece Forged. CNC
- Freewheel/ Cr-Mo Cassette 3 Pawls and 1 spring
- Bearing/ Loose balls
- Axle/ Cr-Mo Steel
- Axle Dim/ 19 (ID12)*142mm
- Spoke/ 14G. 32,36
- Flange PCD/ R:58mm/L:48mm
- Flange Spacing/ 57mm
- Option/ KT-SNDR center lock type



150g

KT-XA2F

Use/ Road, Commuter, Urban, Cyclocross
 Features/ Disc Brake Mount
 Body/ Alloy 1 Piece Forged. CNC
 Bearing/ Sealed. x 2 pcs
 Axle/ 7075 Alloy Machined
 Axle Dim/ M9*100mm*108mm
 Spoke/ 14G. 28,32,36
 Flange PCD/ L:58mm/R:45mm
 Flange Spacing/ 57.5mm



280g

KT-XA2R 8/9/10S

Use/ Road, Commuter, Urban, Cyclocross
 Features/ Disc Brake Mount
 Body/ Alloy 1 Piece Forged. CNC
 Freewheel/ Alloy cassette 3 Pawls and 3 Springs
 Bearing/ Sealed. x 4pcs
 Axle/ 7075 Alloy Machined
 Axle Dim/ M10*130mm*140mm
 Spoke/ 14G. 28,32,36
 Flange PCD/ L: 58mm/R: 45mm
 Flange Spacing/ 52mm
 Option:/ XA5R OLD 135mm*145mm 8/9/10s
 XC5R OLD 135mm*145mm 11s for Road series



228g

KT-XS3F

Use/ Road, Commuter, Urban
 Features/ Disc Brake Mount
 Body/ Alloy 1 Piece Forged. CNC
 Rolling System/ Loose Balls
 Axle/ Cr-Mo Steel
 Axle Dim/ M9*100mm*108mm
 Spoke/ 14G. 28,36
 Flange PCD/ 58mm
 Flange Spacing/ 57.5mm
 Option/ KT-XS5F 3/8" solid axle version



431g

KT-XS8R 11S (for Road series)

Use/ Road, Commuter, Urban
 Features/ Disc Brake Mount
 Body/ Alloy 1 Piece Forged. CNC
 Freewheel/ Steel Splined 3 Pawls
 Rolling System/ Loose Balls
 Axle/ Cr-Mo Steel
 Axle Dim/ M10*135mm*145mm
 Spoke/ 14G. 24,28,36
 Flange PCD/ 58mm
 Flange Spacing/ 52mm
 Option/ KT-XS3R M10*130*140 8/9/10spd
 KT-XS9R M10*130*140 11spd for Road series



KT-QA1F

Use/ Road, Commuter, Urban
 Features/ U-Brake
 Body/ Alloy 1 Piece Forged. CNC
 Bearing/ Sealed. x 2 pcs
 Axle/ 7075 Alloy. Machined
 Axle Dim/ M9*100mm*108mm
 Spoke/ 14G. 20,24,28
 Flange PCD/ 34mm
 Flange Spacing/ 74mm



KT-QA1R 8/9/10/11S

Use/ Road, Commuter, Urban
 Features/ U-Brake
 Body/ Alloy 1 Piece Forged. CNC
 Freewheel/ Alloy Cassette 3 Pawls and 3 Springs
 Bearing/ Sealed. x 4pcs
 Axle/ 7075 Alloy. Machined
 Axle Dim/ M10*130mm*140mm
 Spoke/ 14G. 24,28
 Flange PCD/ 48mm
 Flange Spacing/ 57mm
 Option/ QB1R 2 bearings w/Steel Splined Type 3 Pawls



KT-599F

Use/ Road, Commuter, Urban
 Features/ U-Brake
 Body/ Alloy 1 Piece Forged. CNC
 Bearing/ Sealed. x 2 pcs
 Axle/ 7075 Alloy. Machined
 Spoke/ 14G. 24,28,36
 Flange PCD/ 40mm
 Flange Spacing/ 74mm



KT-GT2R 11S (for Road series)

Use/ Road, Commuter, Urban
 Features/ U-Brake
 Body/ Alloy 1 Piece Forged. CNC
 Freewheel/ Steel Splined 3 Pawls
 Bearing/ Sealed. x 2pcs
 Axle/ 7075 Alloy. Machined
 Axle Dim/ M10*130mm*140mm
 Spoke/ 14G. 28,32,36
 Flange PCD/ 46mm
 Flange Spacing/ 50mm
 Option/ GT1R 8/9/10spd



143g

KT-QZ1F

Use/ Road, Commuter, Urban
 Features/ U-Brake
 Body/ Alloy 1 Piece Forged. CNC
 Rolling System/ Loose Balls
 Axle/ Cr-Mo Steel
 Axle Dim/ M9*100mm*108mm
 Spoke/ 14G. 24,28,32
 Flange PCD/ 40mm
 Flange Spacing/ 74mm
 Option/ QS1F Steel Cap Type



368g

KT-QZ1R 115

Use/ Road, Commuter, Urban
 Features/ U-Brake
 Body/ Alloy 1 Piece Forged. CNC
 Freewheel/ Steel Splined 3 Pawls
 Rolling System/ Loose Balls
 Axle/ Cr-Mo Steel
 Axle Dim/ M10*130mm*140mm
 Spoke/ 14G. 28,32
 Flange PCD/ 45mm
 Flange Spacing/ 57mm
 Option:/ QS1R Steel Cap Type 8/9/10 spd



155g

KT-51BF

Use/ Road, Commuter, Urban
 Features/ U-Brake
 Body/ Alloy 1 Piece Forged. CNC
 Rolling System/ Burnished Loose Balls
 Axle/ Cr-Mo Steel
 Axle Dim/ M9*100mm*108mm
 Spoke/ 14G. 24,28
 Flange PCD/ 40mm
 Flange Spacing/ 74mm
 Option/ Anodized Colors Per Order



415g

KT-G5ER 8/9/10S

Use/ Road, Commuter, Urban
 Features/ U-Brake
 Body/ Alloy 1 Piece Forged. CNC
 Freewheel/ Steel Screwing 2 Pawls
 Rolling System/ Loose Balls
 Axle/ Cr-Mo Steel
 Axle Dim/ M10*130mm*140mm
 Spoke/ 14G. 24,28,32,36
 Flange PCD/ 45mm
 Flange Spacing/ 57mm
 Option/ G1ER-w/Steel Cap 8/9/10S
 G12R-w/Steel Cap 7S
 G52R-w/Rubber Seal 7S
 GTER 11spd





125.5g

KT-GP5F

Use/ **Road, Commuter, Urban**
 Features/ **U-Brake**
 Body/ **Alloy 1 Piece Forged. CNC**
 Rolling System/ **Burnished Loose Balls**
 Axle/ **Cr-Mo Steel**
 Axle Dim/ **M9*100mm*108mm**
 Spoke/ **14G. 24,28**
 Flange PCD/ **34mm**
 Flange Spacing/ **72mm**
 Option/ **G15F-Steel Dust Cap**
G55F-Rubber Seal



441g

KT-C08R *Campy 115*

Use/ **CAMPY Road, Commuter, Urban,**
 Features/ **U-Brake**
 Body/ **Alloy 1 Piece Forged. CNC**
 Freewheel/ **Steel Splined 3 Pawls**
 Rolling System/ **Loose Balls**
 Axle/ **Cr-Mo Steel**
 Axle Dim/ **M10*130mm*140mm**
 Spoke/ **4G. 32,36**
 Flange PCD/ **51.5mm**
 Flange Spacing/ **57.6mm**
 Option/ **Anodized Colors Per Order**



148g

KT-515F

Use/ **Economic Road, Commuter, Urban**
 Features/ **U-Brake**
 Body/ **Alloy 1 Piece Forged. CNC**
 Rolling System/ **Loose Balls**
 Axle/ **Cr-Mo Steel**
 Axle Dim/ **Axle Dim:M9*100mm*108mm**
 Spoke/ **14G. 24,28,36**
 Flange PCD/ **40mm**
 Flange Spacing/ **74mm**
 Option/ **516F-3/8" Axle w/Steel Cap**
566F-3/8" Axle w/Rubber Seal



251g

KT-512R *6/7S*

Use/ **Economic Road, Commuter, Urban**
 Features/ **U-Brake**
 Body/ **Alloy 1 Piece Forged. CNC**
 Freewheel/ **Thread Type**
 Rolling System/ **Loose Balls**
 Axle/ **Cr-Mo Steel**
 Axle Dim/ **M10*130mm*140mm**
 Spoke/ **14G. 28,32,36**
 Flange PCD/ **45mm**
 Flange Spacing/ **57mm**
 Option/ **11R-3/8 Axle 6/7S**
513R-3/8 Axle Single Speed
551R-3/8 Axle w/Rubber Seal 6/7S
552R-M10 QR Type w/Rubber Seal 6/7S



290g

KT-DP6F

Use/ **Fixie, Track, Commuter**
 Features/ **High Flange**
 Body/ **Alloy 1 Piece Forged. CNC**
 Bearing/ **Sealed. x 2 pcs**
 Axle/ **Cr-Mo Steel**
 Axle Dim/ **3/8"×100mm×140mm**
 Spoke/ **14G. 28,32,36**
 Flange PCD/ **62.5mm**
 Flange Spacing/ **70.5mm**
 Option/ **DP7F-Loose Balls**
DPBF-Loose Balls w/o CNC Flange
DS9F-Loose Balls M9 Solid Axle
DP5F-M9 QR Type
DK6F-Bolts Type



421g

KT-DP6R**Single Seed**

Use/ **Fixie, Track, Commuter**
 Features/ **High Flange**
 Body/ **Alloy 1 Piece Forged. CNC**
 Freewheel/ **Thread Type L: Double Thread/R: B.C. 1.37×24T**
 Bearing/ **Sealed. x 2pcs**
 Axle/ **Cr-Mo Steel**
 Axle Dim/ **3/8"×120mm×160mm**
 Spoke/ **14G. 28,32,36**
 Flange PCD/ **62.5mm**
 Flange Spacing/ **67mm**
 Option/ **DP7R-Loose Balls**
DPBR-Loose Balls w/o CNC Flange
DS9R-Loose Balls M10 Solid Axle
DP5R-M10 QR Type
DK6R-Bolts Type




FIXIE



218g

KT-576F

Use/ **Fixie, Track, Commuter**
 Features/ **Low Flange**
 Body/ **Alloy 1 Piece Forged. CNC**
 Bearing/ **Sealed. x 2 pcs**
 Axle/ **Cr-Mo Steel**
 Axle Dim/ **3/8"×100mm×140mm**
 Spoke/ **14G. 24,28,32,36**
 Flange PCD/ **40mm**
 Flange Spacing/ **74mm**
 Option/ **566F-Loose Balls**

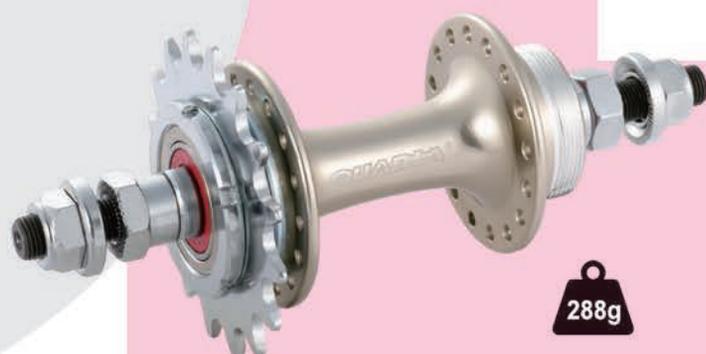

288g

KT-5i3R**Single Speed**

Use/ **Fixie, Track, Commuter**
 Features/ **Low Flange**
 Body/ **Alloy 1 Piece Forged. CNC**
 Freewheel/ **Thread Type L: Double Thread/R: B.C. 1.37×24T**
 Bearing/ **Sealed. x 2pcs**
 Axle/ **Cr-Mo Steel**
 Spoke/ **14G. 28,32,36**
 Flange PCD/ **45mm**
 Flange Spacing/ **57mm**
 Option/ **5J3R-Loose Balls**



237g

KT-MHGF

- Use/ **XC, Freeride, Commuter**
 Features/ **Disc Brake Mount M6 Bolt Type**
 Body/ **Alloy 1 Piece Forged. CNC**
 Bearing/ **Sealed. x 2 pcs**
 Axle/ **7075 Alloy. Machined**
 Axle Dim/ **M9*100mm*108mm**
 Spoke/ **14G. 28,32,36**
 Flange PCD/ **58mm**
 Flange Spacing/ **57.5mm**
 Option/ **Anodized Colors Per Order**



498g

KT-Mi5R 15 Cassette

- Use/ **DH, XC.Freeride.Commuter**
 Features/ **Disc Brake Mount**
 Body/ **Alloy 1 Piece Forged. CNC**
 Freewheel/ **Freehub body*5Pawls and 5 Spring w/12T~18T cog**
 Bearing/ **Sealed. x 4pcs**
 Axle/ **Cr-Mo Steel**
 Axle Dim/ **3/8"*135mm*175mm**
 Spoke/ **28,32,36,48**
 Flange PCD/ **44mm**
 Flange Spacing/ **78mm**



KT-MBAF

- Use/ **Street, Vert**
 Features/ **Bolt Nut Type**
 Body/ **Alloy 1 Piece Forged. CNC**
 Bearing/ **Sealed. x 2 pcs**
 Axle/ **7075 Alloy. Machined**
 Axle Dim/ **3/8"×24T Axle Bolts*100mm**
 Spoke/ **14G. 32,36**
 Flange PCD/ **45mm**
 Flange Spacing/ **65mm**
 Option/ **MBJF-Cr-Mo 3/8"×24T Axle Bolts*100mm**



KT-MBAR 1S

- Use/ **Street, Vert**
 Features/ **One-Piece Driver W/Bolt Nut Type**
 Body/ **Alloy 1 Piece Forged. CNC**
 Freewheel/ **9T Driver*4 Pawls**
 Bearing/ **Sealed. x 5pcs**
 Axle/ **7075 Alloy. Machined**
 Axle Dim/ **M14 (3/8"×24T Axle Bolts)*110mm*120mm**
 Spoke/ **14G. 32,36**
 Flange PCD/ **L: 51.5mm/R:57mm**
 Flange Spacing/ **57mm**
 Option/ **MBCR-Cr-Mo Axle**



KT-MIOF

- Use/ **Street, Freestyle**
 Features/ **Bolt Nut type**
 Body/ **Alloy 1 Piece Forged. CNC**
 Rolling System/ **Loose Balls**
 Axle/ **Cr-Mo Steel**
 Axle Dim/ **3/8"×24T Axle Bolts*100mm**
 Spoke/ **14G. 32,36**
 Flange PCD/ **45mm**
 Flange Spacing/ **65mm**
 Option/ **Anodized Colors Per Order**



KT-MI8R Single Speed

- Use/ **Street, Vert**
 Features/ **One-Piece Driver W/Bolt Nut Type**
 Body/ **Alloy 1 Piece Forged. CNC**
 Freewheel/ **9T Driver*4 Pawls**
 Rolling System/ **Loose Balls+1 Seal Bearing**
 Axle/ **Cr-Mo Steel**
 Axle Dim/ **M14 (3/8"×24T Axle Bolts)*110mm*120mm**
 Spoke/ **14G. 32,36,48**
 Flange PCD/ **57mm**
 Flange Spacing/ **57mm**
 Option/ **Anodized Color Per Order**





364g

KT-M18F

Use/ **Street, Freestyle**
 Features/ **U-Brake**
 Body/ **Alloy 1 Piece Forged. CNC**
 Rolling System/ **Loose Balls**
 Axle/ **Cr-Mo Steel**
 Axle **M14*100mm*170mm**
 Spoke/ **14G. 36**
 Spoke/Flange PCD/ **45mm**
 Flange Spacing/ **72mm**
 Option/ **M17F-3/8" Axle**



648g

KT-M89R Single Speed

Use/ **Street, Freestyle**
 Features/ **One-Piece Driver**
 Body/ **Alloy 1 Piece Forged. CNC**
 Freewheel/ **9T Driver*4 Pawls**
 Rolling System/ **Loose Balls+1 Seal Bearing**
 Axle/ **Cr-Mo Steel**
 Axle Dim/ **M14*110mm*180mm**
 Spoke/ **14G. 36,48**
 Flange PCD/ **57mm**
 Flange Spacing/ **57mm**
 Option/ **M83R-3/8" Axle**



155g

KT-566F

Use/ **Street, Freestyle**
 Features/ **U-Brake**
 Body/ **Alloy 1 Piece Forged. CNC**
 Rolling System/ **Loose Balls**
 Axle/ **Cr-Mo Steel**
 Axle Dim/ **3/8" * 100mm * 160mm**
 Spoke/ **14G. 24,28,36**
 Flange PCD/ **40mm**
 Flange Spacing/ **74mm**
 Option/ **516F-3/8" Axle w/Steel Cap**



538g

KT-A89R Single Speed

Use/ **Street, Freestyle**
 Features/ **One-Piece Driver**
 Body/ **Body: Alloy 1 Piece Forged. CNC**
 Freewheel/ **9T Driver*3 Pawls**
 Rolling System/ **Loose Balls+1 Seal Bearing**
 Axle/ **Cr-Mo Steel**
 Axle Dim/ **M14*110mm*160mm/175mm**
 Spoke/ **14G. 36,48**
 Flange PCD/ **52mm**
 Flange Spacing/ **57mm**
 Option/ **KT-ADJR Seal Bearing Type**
KT-ABJR Seal Bearing Bolt Type



151g

KT-AF1F

- Use/ **BMX Race**
- Features/ **U-Brake**
- Body/ **Alloy 1 Piece Forged. CNC**
- Bearing/ **Sealed. x 2 pcs**
- Axle/ **7075 Alloy Machined**
- Axle Dim/ **ID20*100mm**
- Spoke/ **14G. 32,36**
- Flange PCD/ **46**
- Flange Spacing/ **72**
- Option/ **Anodized Colors Per Order**



301g

KT-MA5R *Single Speed*

- Use/ **BMX Race**
- Features/ **U-Brake**
- Body/ **Alloy 1 Piece Forged. CNC**
- Freewheel/ **Alloy Cassette 5 Pawls and 5 Springs**
- Bearing/ **Sealed. x 5 pcs**
- Axle/ **7075 Alloy Machined**
- Axle Dim/ **ID15*110mm**
- Spoke/ **14G. 32,36**
- Flange PCD/ **58**
- Flange Spacing/ **58**
- Option/ **Anodized Colors Per Order**



269g

KT-M6GF

- Use/ **BMX (Race), Street**
- Features/ **U-Brake**
- Body/ **Alloy 1 Piece Forged. CNC**
- Rolling System/ **Sealed. x 2 pcs**
- Axle/ **Cr-Mo Steel**
- Axle Dim/ **3/8**100mm*140mm**
- Spoke/ **14G. 28,32,36**
- Flange PCD/ **38mm**
- Flange Spacing/ **67mm**
- Option/ **Anodized Colors Per Order**



522g

KT-M95R *Single Speed*

- Use/ **Street, Freestyle, Racing**
- Features/ **Cassette Single Speed**
- Body/ **Alloy 1 Piece Forged. CNC**
- Freewheel/ **Steel 4 Pawls, 12T~18T Cogs**
- Bearing/ **Sealed. x 4pcs**
- Axle/ **Cr-Mo Steel**
- Axle Dim/ **M14*110mm*175mm**
- Spoke/ **14G. 36H**
- Flange PCD/ **46mm**
- Flange Spacing/ **57.4mm**
- Option/ **M98R-3/8" Axle**
M9ER-M6 Bolts Type



BMX

**KT-350F**

Use/ **Street, Freestyle**
 Features/ **U-Brake**
 Body/ **Alloy 1 Piece Forged. CNC**
 Rolling System/ **Loose Balls**
 Axle/ **Cr-Mo Steel**
 Axle Dim/ **M14*100mm*170mm**
 Spoke/ **14G. 36,48**
 Flange PCD/ **45mm**
 Flange Spacing/ **71mm**
 Option/ **330F-3/8" Axle**

466g

**KT-355R** *Single Speed*

Use/ **Street, Flatland, Commuter, Alternative**
 Features/ **Free coaster driver**
 Body/ **Alloy 1 Piece Forged. CNC**
 Freewheel/ **Sprocket 14T/16T**
 Rolling System/ **Loose Balls**
 Axle/ **Cr-Mo Steel**
 Axle Dim/ **M14*110mm*170mm**
 Spoke/ **14G. 36,48**
 Flange PCD/ **51.5mm**
 Flange Spacing/ **59mm**
 Option/ **335R-3/8" Axle**

740g

**KT-3V5R** *Single Speed*

Use/ **Street, Flatland, Commuter, Alternative**
 Features/ **Free coaster**
 Body/ **Alloy 1 Piece Forged. CNC**
 Freewheel/ **One-piece driver 9T**
 Bearing/ **Sealed. x 4 pcs**
 Axle/ **Cr-Mo Steel**
 Axle Dim/ **M14*110mm*175mm**
 Spoke/ **14G. 32,36**
 Flange PCD/ **58mm**
 Flange Spacing/ **60mm**
 Option/ **Anodized Colors Per Order**

698g

KT-12TF

Use/ **Economic Street, Freestyle**
Features/ **Nut Type**
Body/ **Steel**
Rolling System/ **Balls Retainer**
Axle/ **S45C Steel**
Axle Dim/ **M14*100mm*165mm**
Spoke/ **14G. 36,48,68**
Flange PCD/ **61mm**
Flange Spacing/ **56mm**
Option/ **135F-3/8" Axle**



550g



514g

KT-12TR *Single Speed*

Use/ **Economic Street, Freestyle**
Features/ **Nut Type**
Body/ **Steel**
Freewheel/ **Thread Type**
Rolling System/ **Balls Retainer**
Axle/ **S45C Steel**
Axle Dim/ **M14*110mm*165mm**
Spoke/ **14G. 36,48,68**
Flange PCD/ **61mm**
Flange Spacing/ **56mm**
Option/ **135R-3/8" Axle**

KT-11TF

Use/ **Economic Street, Freestyle**
Features/ **Nut Type**
Body/ **Steel**
Rolling System/ **Balls Retainer**
Axle/ **S45C Steel**
Axle Dim/ **M14*100mm*170mm**
Spoke/ **14G. 36,48**
Flange PCD/ **45mm**
Flange Spacing/ **54mm**
Option/ **116F-3/8" Axle**



498g



516g

KT-11TR *Single Speed*

Use/ **Economic Street, Freestyle**
Features/ **Nut Type**
Body/ **Steel**
Freewheel/ **Thread Type**
Rolling System/ **Balls Retainer**
Axle/ **S45C Steel**
Axle Dim/ **M14*110mm*175mm**
Spoke/ **14G. 36,48**
Flange PCD/ **45mm**
Flange Spacing/ **57mm**
Option/ **116R-3/8" Axle**



418g

KT-104R *Single Speed*

Use/ **Economic Street, Freestyle**
Features/ **Nut Type**
Body/ **Steel**
Freewheel/ **M30 Thread Type**
Rolling System/ **Rolling System: Balls Retainer**
Axle/ **S45C Steel**
Axle Dim/ **M14*110mm*175mm**
Spoke/ **14G. 36,48**
Flange PCD/ **45mm**
Flange Spacing/ **57mm**
Option/ **106R-3/8" Axle**





73g

KT-A8BF

Use/ **Folding, Kids, Alternative**
 Features/ **Caliper-Brake**
 Body/ **Alloy 1 Piece Forged. CNC**
 Bearing/ **Sealed. x 2 pcs**
 Axle/ **7075 Alloy. Machined**
 Axle Dim/ **M9*74mm*82mm**
 Spoke/ **14G. 24,28,32**
 Flange PCD/ **34mm**
 Flange Spacing/ **50mm**
 Option/ **A5BF M9*65mm*73mm**



278g

KT-588R *Single Speed*

Use/ **Folding, Kids, Alternative**
 Features/ **Caliper-Brake**
 Body/ **Alloy 1 Piece Forged. CNC**
 Freewheel/ **9T Driver*2 Pawls**
 Bearing/ **Sealed. x 4pcs**
 Axle/ **CrMo Steel**
 Axle Dim/ **3/8"*80mm*118mm**
 Spoke/ **14G. 24,28,32**
 Flange PCD/ **45mm**
 Flange Spacing/ **48mm**
 Option/ **Anodized Colors Per Order**



140g

KT-A8QF

Use/ **Folding, Kids, Alternative**
 Features/ **Caliper-Brake M6 Bolt Type**
 Body/ **Alloy 1 Piece Forged. CNC**
 Bearing/ **Loose Balls**
 Axle/ **Cr-Mo Steel**
 Axle Dim/ **M10*83mm*91mm**
 Spoke/ **14G. 20,24,28**
 Flange PCD/ **40mm**
 Flange Spacing/ **50mm**
 Option/ **A86F-3/8" Axle**
A85F-M9 QR Type



395g

KT-A86R *Single Speed*

Use/ **Folding, Kids, Alternative**
 Features/ **Caliper-Brake**
 Body/ **Alloy 1 Piece Forged. CNC**
 Freewheel/ **11T Driver*2 Pawls**
 Rolling System/ **Loose Balls**
 Axle/ **S45C Steel**
 Axle Dim/ **3/8"*85mm*130mm**
 Spoke/ **14G. 20,24,28**
 Flange PCD/ **45mm**
 Flange Spacing/ **48mm**
 Option/ **A8QR M6 Bolt Type**




KT-325R 2S

Use/ Cruiser, Commuter, Kids, Urban,
 Features/ Internal 2 spd Coaster Brake
 Body/ Steel
 Freewheel/ 18T/20T/22T sprocket
 Rolling System/ Rolling System: Balls Retainer
 Axle/ Cr-Mo Steel
 Axle Dim/ 3/8"*112mm*155mm
 Spoke/ 14G. 36
 Flange PCD/ 63mm
 Flange Spacing/ 55mm
 Ration/ 1:1.3
 Shift Angle/ 45~60
 Brake Angle/ 60~75

1323g

30

URBAN BIKE

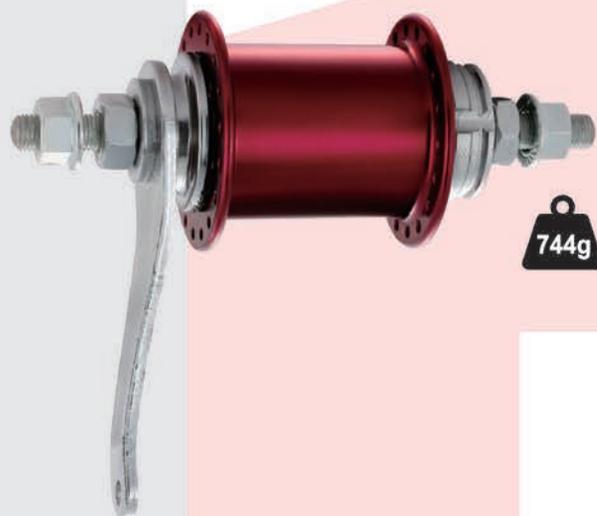

KT-3A5R Single Speed

Use/ Cruiser, Commuter, Urban
 Features/ Alloy Coaster Brake
 Body/ Alloy 1 Piece Forged. CNC
 Freewheel/ 14T/16T/18T/20T/22T sprocket
 Rolling System/ Balls Retainer
 Axle/ Cr-Mo Steel
 Axle Dim/ 3/8"*110mm*167mm
 Spoke/ 14G. 32,36
 Flange PCD/ 51.5mm
 Flange Spacing/ 59mm
 Option/ Anodized Colors Per Order

744g



KT-319R Single Speed

Use/ 4" wide tire, Chopper, Urban, Alternative
 Features/ Coaster Brake
 Body/ Steel
 Freewheel/ 14T/16T/18T
 Rolling System/ Balls Retainer
 Axle/ Cr-Mo Steel
 Axle Dim/ 3/8"*24T*170mm*210mm
 Spoke/ 14G. 36
 Flange PCD/ Flange PCD: 51.5mm
 Flange Spacing/ 101.3mm

1110g




KT-305R Single Speed

- Use/ **Cruiser, Kids, Commuter, Urban**
- Features/ **Coaster Brake**
- Body/ **Steel**
- Freewheel/ **14T/16T/18T/20T/22T sprocket**
- Rolling System/ **Rolling System: Balls Retainer**
- Axle/ **Cr-Mo/S45C Steel**
- Axle Dim/ **3/8"*110mm*167mm**
- Spoke/ **14G. 16,20,28,32,36**
- Flange PCD/ **51.5mm**
- Flange Spacing/ **47.7mm**
- Option/ **305RA For Beach Cruisers 847.5g**
Cr-Mo Axle 10/12/13/14G*32/36/40H
305RB For BMX/Kids Bike
S45C Axle 846g 14G*12/16/20/28H
305RC For Plastic Wheel
S45C Axle 14G*3/6H



766g

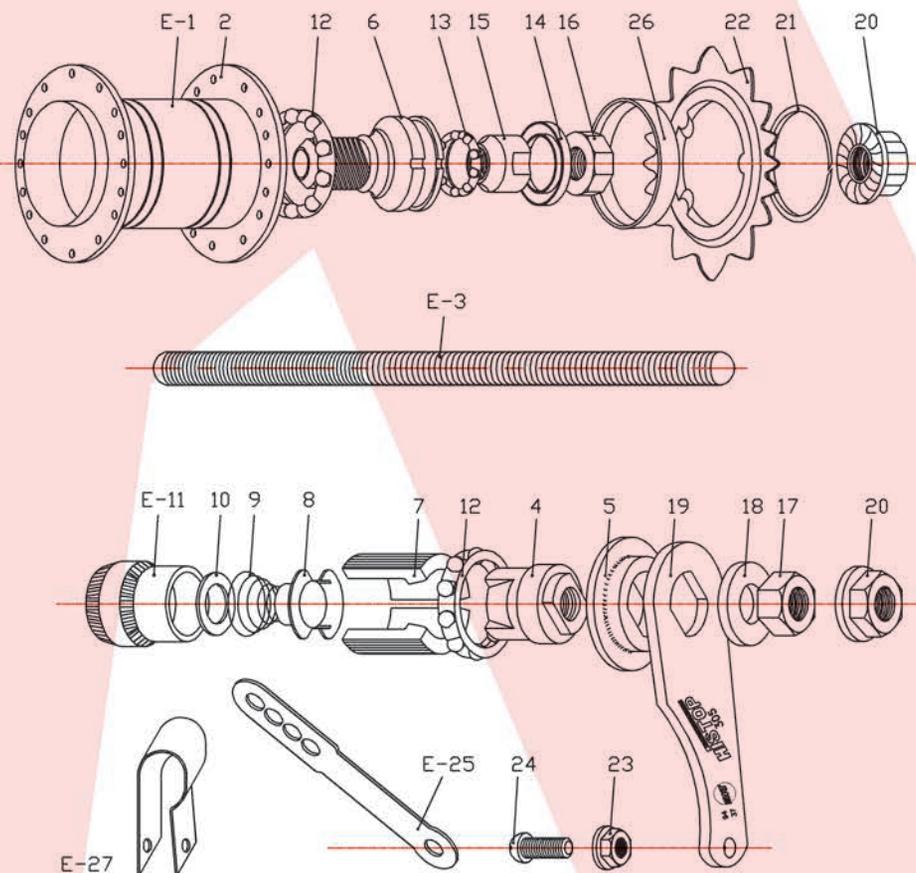

PART NO.	DESCRIPTION
E-1	SHELL
E-2	FLANGE
E-3	AXLE
E-4	BRAKE CONE
E-5	DUST CAP
E-6	DRIVER
E-7	DRAKE SHOE
E-8	SPRING HOLDER
E-9	CLUTCH SPRING
E-10	CLUTCH WASHER
E-11	CLUTCH CONE
E-12	BALL RETAINER 7/32" x 9pcs
E-13	BALL RETAINER 1/4" x 7pcs
E-14	CONE COVER
E-15	CONE
E-16	LOCK NUT (A) 17x 7mm
E-17	LOCK NUT (A) 17x 9mm
E-18	WASHER
E-19	BRAKE ARM
E-20	FLANGE NUT 3/8" x 24T
E-21	LOCK RING
E-22	SPROCKET 14T, 16T, 18T, 19T, 20T, 22T
E-23	CLIP NUT
E-24	CLIP SCREW
E-25	ARM CLIP
E-26	DUST CAP
E-27	DENG ARM CLIP

KT-155F


Use/ **Adult Tricycle**
Features/ **Hub Shell**
Body/ **Steel**
Bearing/ **Sealed. x 2pcs**
Spoke/ **14G.28,36**
Flange PCD/ **42mm**
Flange Spacing/ **70mm**



161g

KT-16CR Single Speed

Use/ **Adult Tricycle**
Body/ **Steel**
Rolling System/ **Balls Retainer**
Axle/ **S45C Steel**
Axle Dim/ **3/8"*124mm*175mm**

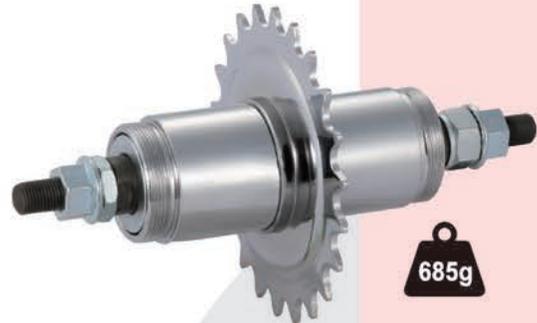

685g



2491g

KT-762R

Use/ **Adult Tricycle**
Features/ **Axle Set**
Freewheel/ **22T Sprocket Single Speed**
Bearing/ **Bearing: Sealed. x 4pcs**
Axle Dim/ **M16.8*762mm**
Spoke/ **14G. 28,36**
Flange PCD/ **42mm**
Flange Spacing/ **70mm**

KT-156F

Use/ **Adult Tricycle**
Features/ **Hub Shell**
Body/ **Steel**
Spoke/ **14G. 28,36**
Flange PCD/ **42mm**
Flange Spacing/ **70mm**



127g

KT-3D5R Single Speed

Use/ **Adult Tricycle**
Body/ **Steel**
Rolling System/ **Balls Retainer**
Axle/ **Cr-Mo Steel**
Axle Dim/ **3/8"*110mm*160mm**



690g

204H/205H

Weight:50.5g/56.5g



204L/205L

Weight:56g/60g



- KT-205R** thread 18mm*M12x1.5 w/nut / Shimano type
- KT-205S** thread 20mm*M12x1.0 w/nut / Syntance type
- KT-205B** thread 20mm*M12x1.75 / Sram type

ID12 for **Downhill** rear hub

Weight:88g/86g/81g



204B

Weight:110g



MODEL	OLD	PITCH	B±1	THREAD LENGTH	WITH NUT	SYSTEM
ROAD	100	M12*P1.5	120	12	-	-
		M12*P1.5	121.5	13.5	-	SHIMANO
		M12*P1.5	125	16	-	SRAM
		M15*P1.5	125	16	-	SRAM
MTB	142	M12*P1.5	163.5	13.5	-	SHIMANO
		M12*P1.5	165	18	-	SHIMANO
		M12*P1.0	166	20	Y	SYNTACE
		M12*P1.0	166	20	-	DT SWISS
		M12*P1.75	167	20	-	SRAM
		M12*P1.5	170	18	Y	SHIMANO
		M12*P1.5	172	18	Y	SHIMANO
	M12*P1.75	174	20	-	SRAM	
	148	M12*P1.5	178	18	Y	SHIMANO
		M12*P1.75	180	20	-	SRAM
FAT BIKE	150	M15*P1.5	199	12	-	ROCKSHOX
	197	M12*P1.5	227	18	Y	SHIMANO
M12*P1.75		229	20	-	SRAM	
MTB	100	M14*P1.5	145	16	Y	FOX
		M15*P1.5	150	20	-	SRAM

KT-204Y/KT-205Y

Weight:54g/61g



KT-258F/KT-259R

Weight:61g/66g



KT-204P/KT-205P

Weight:61g/66g



KT-206F/KT-207R

Weight:58g/116.5g



KT-204N/KT-205N

Weight:56g/61g



KT-260F/KT-261R

Weight:120g/160g



SPLINED TYPE

Loose Balls Type 8/9S:
KT-SB8-3:3 pawls
(Inner/outer seal included)
Weight:164g



SCREWING TYPE

Loose Balls Type:
KT-CB8:8/9S
KT-CB7:7S
(Inner/outer seal included)
Weight:184g



ALLOY CASSETTE BODY TYPE

Alloy cassette body for 4-5 seal bearing hubs
2 seal bearing
5 Pawls and 5 Spring
AL7075 Shimano 8/9/10/11 for MTB
AL7075 Sram 11/12 XD Driver for MTB



Cr-Mo CASSETTE BODY TYPE

Cr-Mo cassette body for 4-5 seal bearing hubs
2 seal bearing
3 Pawls and 1 Spring
Shimano 8/9/10/11 for MTB
Sram 11/12 XD Driver for MTB



FIXED GEAR HUBS PARTS SET

FG-14 for 14T sprocket
Available for 14~18T sprocket
Including Sprocket, Lock-ring & washer





NUTS

Color option:



- 淮安廠 : 明倫運動器材(淮安)有限公司
江蘇省淮安經濟技術開發區深圳東路289號 P.C.:223001
- H.A. Factory No.289, ShenZhen East Road, Huai An Economic and Technological Development Area, JiangSu Province
TEL:0086-(0)517-89897100 FAX:0086-(0)517-89897071
- 深圳辦公室/倉庫 : 深圳市光明新区公明镇上村莲塘工业区河堤路18号
S.Z. office / warehouse NO.18 Hedi Road,Shangcun Liantang Industial, Gongming Town, SHENZHEN, China
TEL : 0086-(0)755-27726748
E-mail:kthub@kthub.com ktsales@kthub.com Web:www.ktgroup.net
- 昆山辦事處 : 江苏省昆山市城北中路888号3号楼3楼
K.S. Office 3rd floor, 888 Chengbeizhong Road, Kunshan City, Jiangsu Province
TEL:0512-57760667 FAX:0512-50176248
E-mail:century-dream@163.com
- 浙江辦事處 : 浙江杭州市蕭山區原野汽配城8棟46號 P.C.:311200
Z.J. Office NO. 46 Building 8, YuanYe Auto Parts City XiaoShan District HangZhou City ZheJiang China
TEL:0086-571-82236146 FAX:0086-571-82652135
MOBILE:0086-13967153199
- 天津辦事處 : 中国北方自行车电动车城G1-212, 天津东丽区晋中街 P. C. 300300 D13
T.J.Office G1-212 Bicycle Electric Vehicle City, North China, Jinzhong Street, Dongli District, Tianjin
TEL : 0086(0)22-26790586 FAX : 0086(0)22-26790526
E-mail:kthub@yahoo.cn
- 台灣辦事處 : 42951 台灣台中市神岡區庄前路28號
Taiwan Office No.28, Zhuangqian Rd., Shengang Dist., Taichung City 429, Taiwan (R.O.C.)
T:+886-4-2563-0919 F:+886-4-2563-0959
E-mail:leo@kthub.com
- 德國代理商 : TAIMCO
Taimco e.K.
Bahnhofstraße 11
32105 Bad Salzuflen (Germany)
Germany Agent TEL:0049(0)5222-639715 FAX:0049(0)5222-366870
E-mail:service@taimcol.de Web:http://www.taimco.de/net
- 巴西代理商 : Joy Tech Com. Imp. e Exp. Ltda.
Brazil Agent website: www.joytech.com.br
e-mail: contato@joytech.com.br

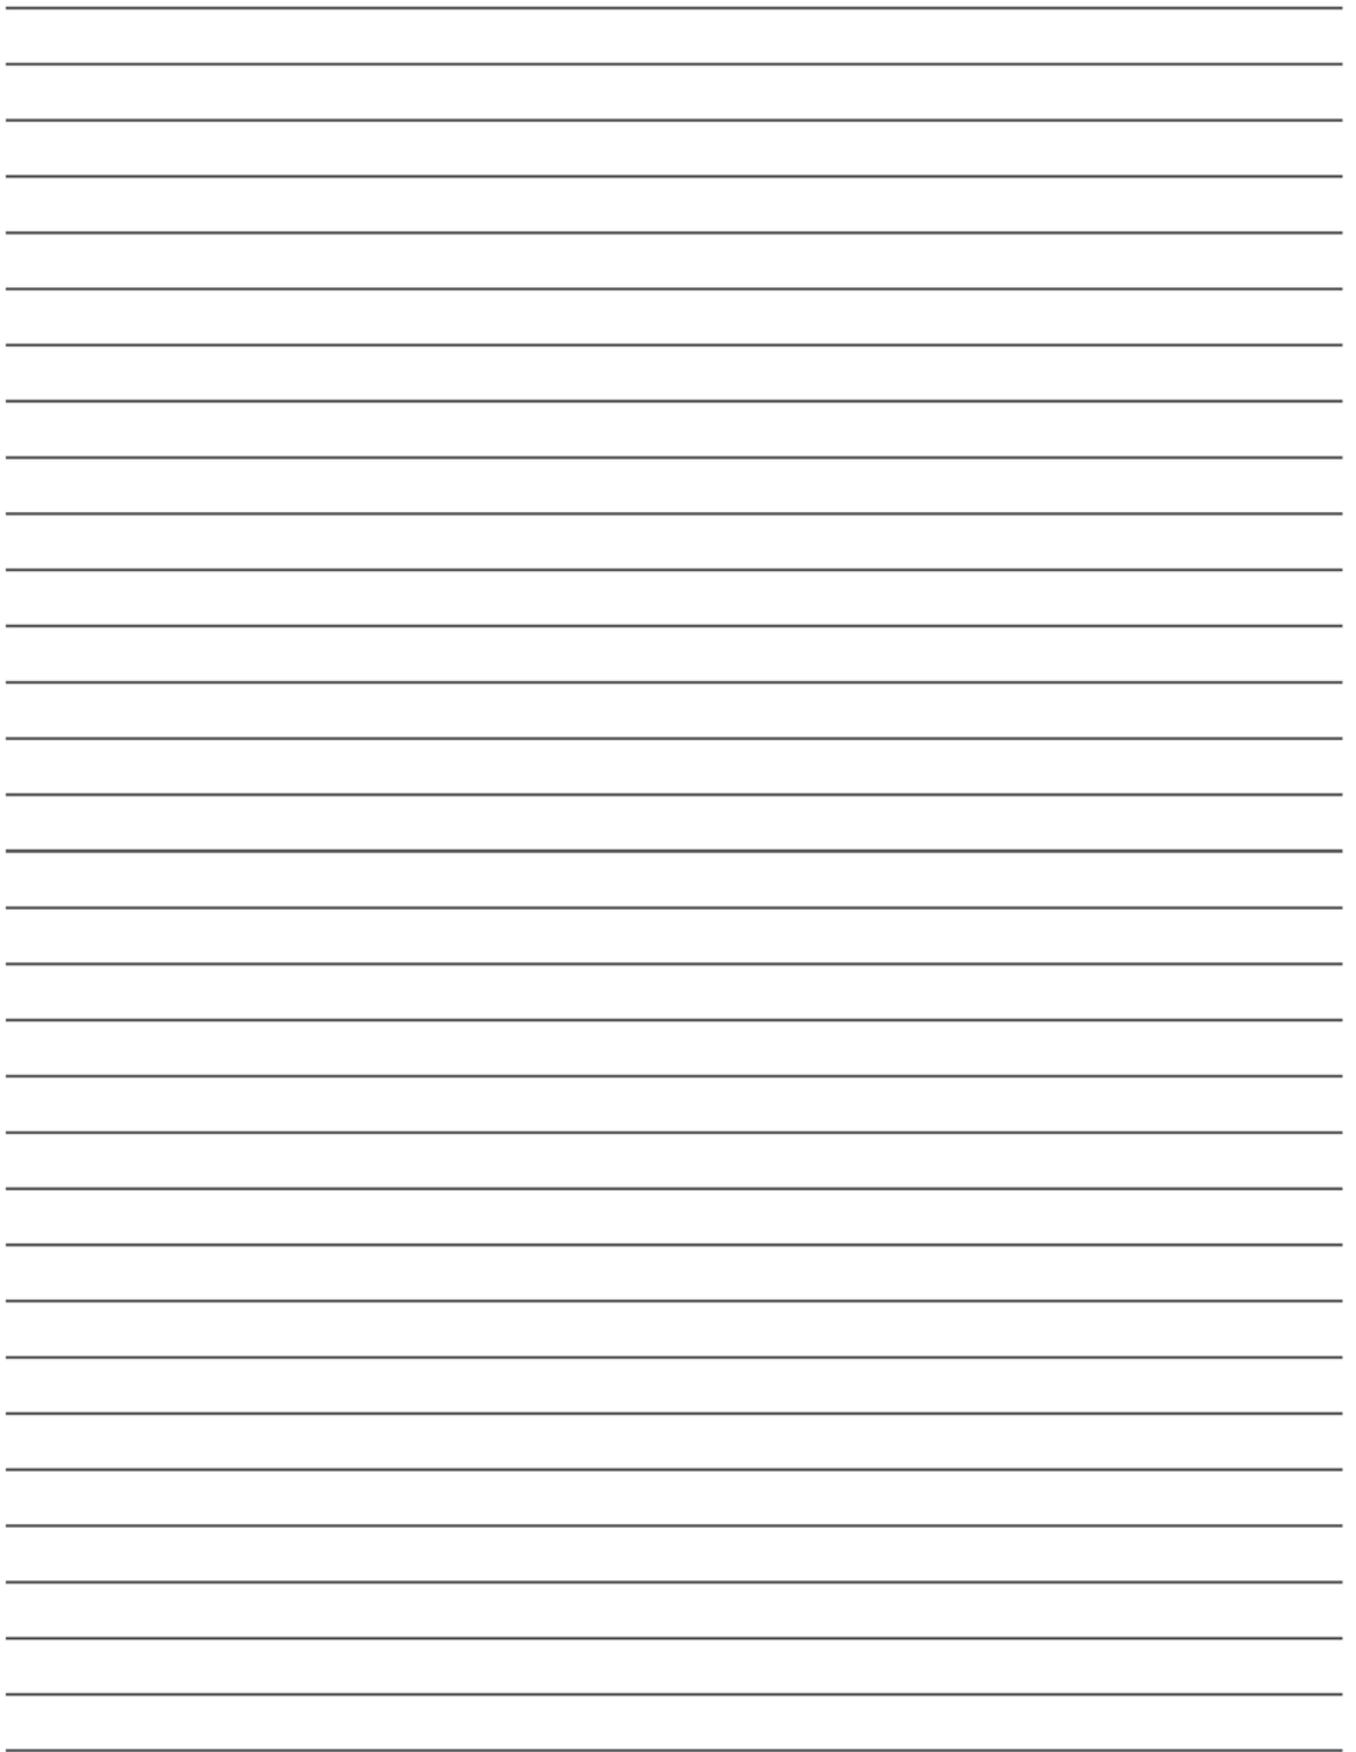

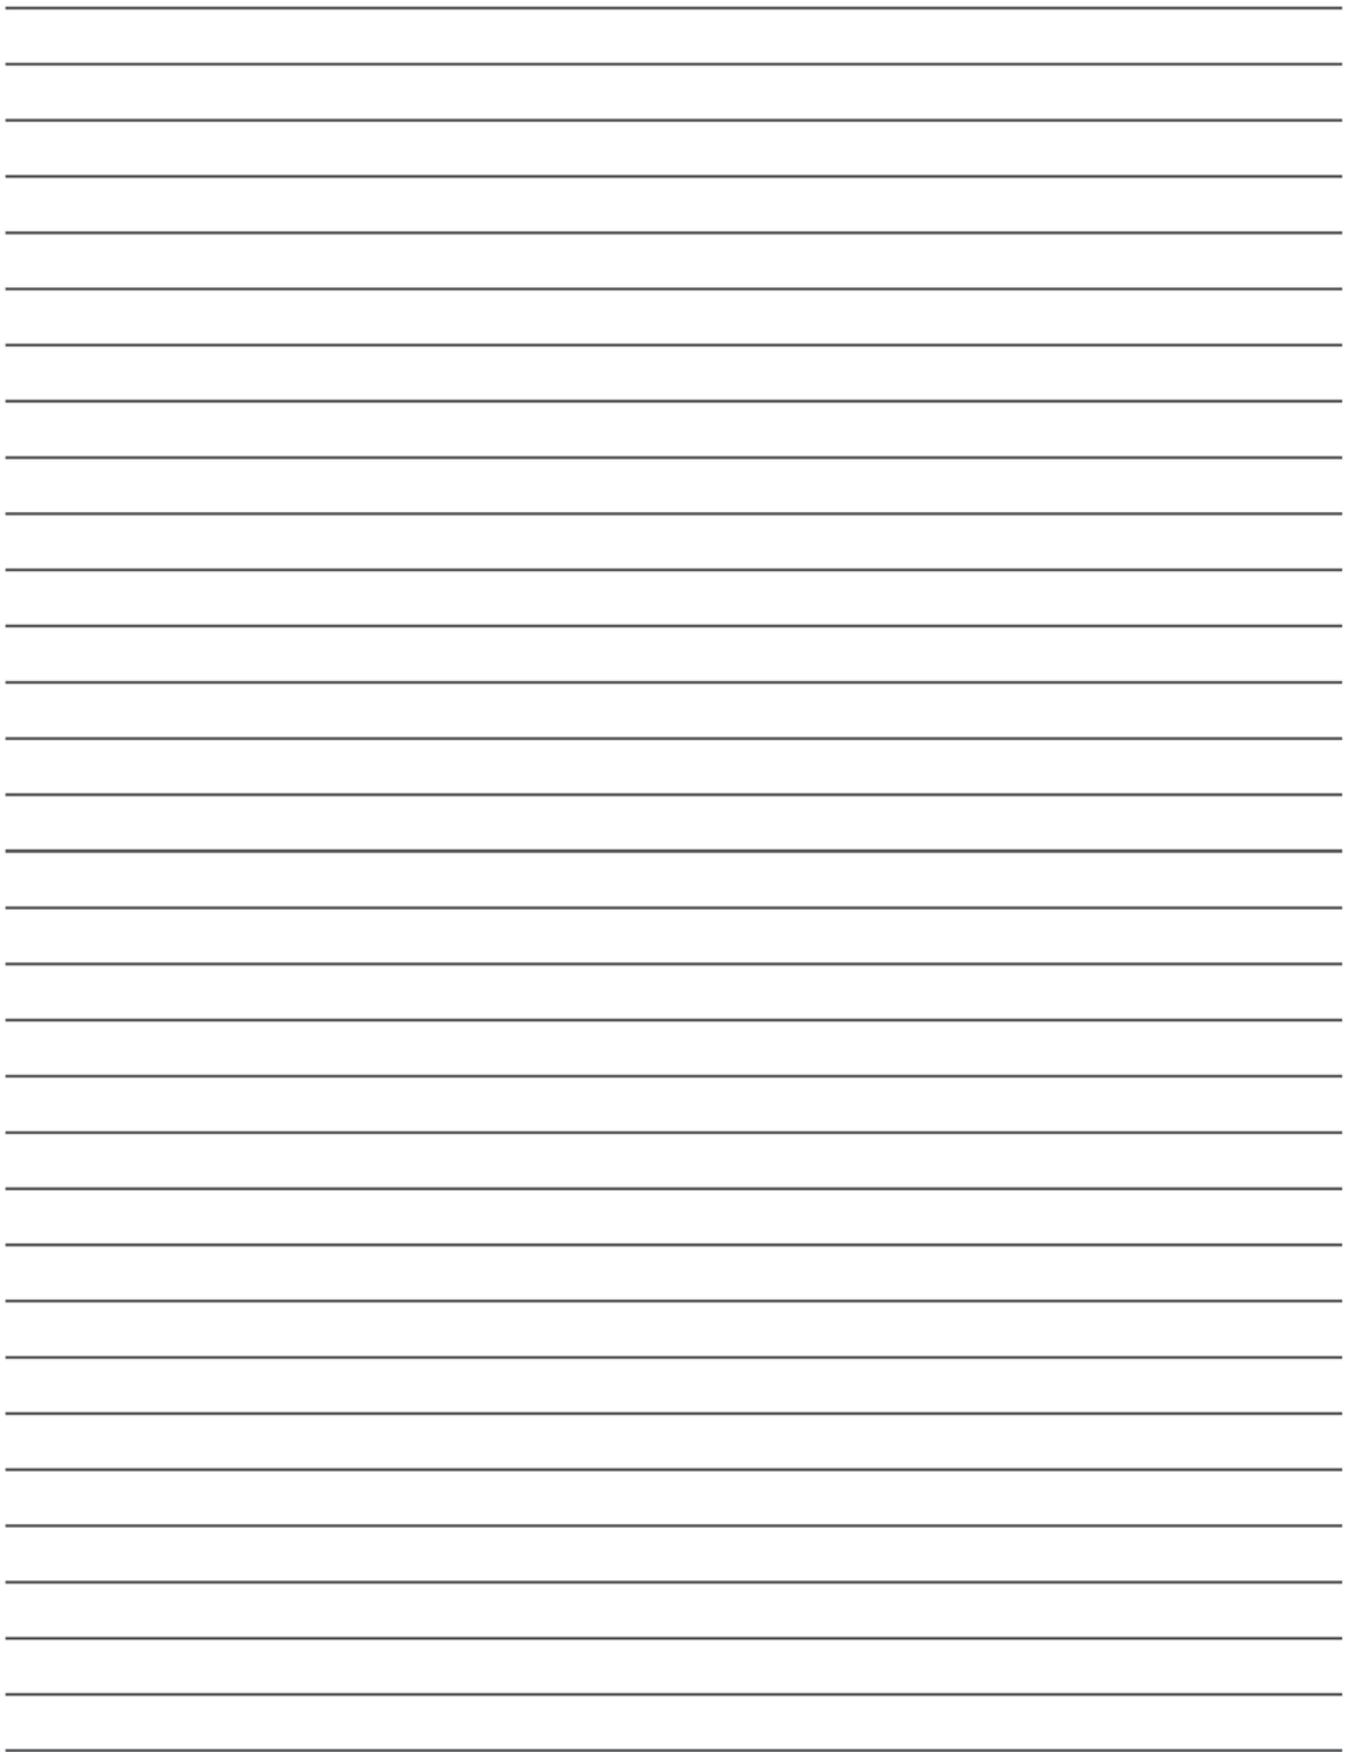

High Performance Hub

“Be the most valuable supplier in bicycle industry”.



www.ktgroup.net

QUANTA

QUANDO
High Performance Hub.